

Motor data sheet


M3BP 90 LA 4

Definition	Data	Unit	Remarks
Product code	3GBP 092 510-**L		
Voltage code	D		
Type/Frame	M3BP 90 LA 4		
Design	CENELEC		
Efficiency class	IE3		
Rated output P_N	1.1	kW	
Rated voltage U_N	400	V D	± 5 % (IEC 60034-1)
Rated frequency f_N	50	Hz	± 2 % (IEC 60034-1)
Rated speed n_N	1443	r/min	
Rated current I_N	2.4	A	
Starting current I_S/I_N	5.2		
Nominal torque T_N	7.26	Nm	
Locked rotor torque T_l/T_N	3.4		
Maximum torque T_b/T_N	4.2		
Efficiency - full load 100%	84.1	%	Acc. to IEC 60034-2-1
Efficiency - 75%	84.1	%	
Efficiency - 50%	81.6	%	
Power factor - full load 100%	0.77		
Bearing DE/NDE	6205-2Z/C3 6204-2Z/C3		
Sound pressure level L_{pA} dB	56	dB(A)	+3dB(A)
Moment of inertia $J = \frac{1}{4} GD^2$ kgm ²	0	kg-m ²	
Weight	28	kg	

Motor data sheet

M3BP 90 LA 4

Running performance chart

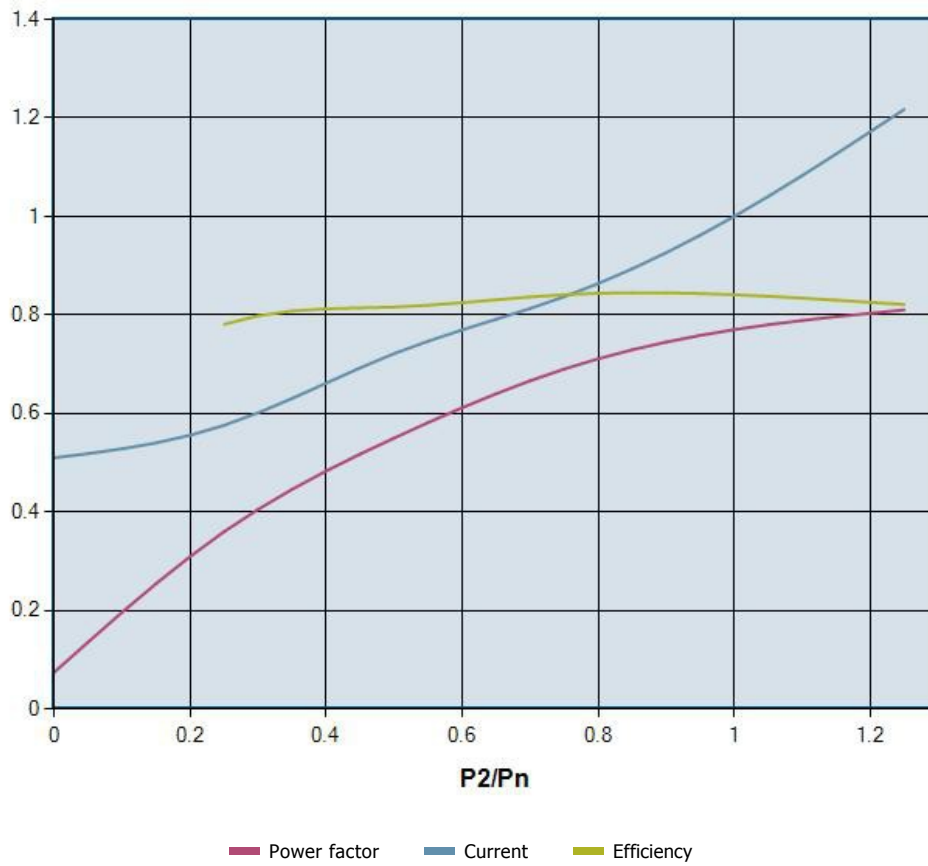

Motor data sheet

M3BP 90 LA 4

Starting performance chart information

