


ABB Motors and Generators		Technical Data Sheet - DOL			
		Project	Location		
Department/Author		Customer name	Customer ref.		Item name <b>1.0003</b>
Our ref.		Rev/Changed by <b>A</b>	Date of issue <b>21/11/2017</b>	Saving ident <b>wimes stock.do2.xls</b>	Pages <b>1(3)</b>
No.	Definition	Data	Unit	Remarks	
1	Product	<b>TEFC, 3-phase, squirrel cage induction motor</b>			
2	Product code	<b>3GBA 092 120-ASD</b>		Calc. ref.	3GZC021009-105
3	Type/Frame	<b>M2BAX 90SB 4</b>			
4	Mounting	<b>IM1001, B3(foot)</b>			
5	Rated output P <sub>N</sub>	<b>1.1</b>	kW		
6	Service factor	<b>1</b>			
7	Type of duty	<b>S1(IEC) 100%</b>			
8	Rated voltage U <sub>N</sub>	<b>400</b>	VY	± 5 % (IEC 60034-1)	
9	Rated frequency f <sub>N</sub>	<b>50</b>	Hz	± 2 % (IEC 60034-1)	
10	Rated speed n <sub>N</sub>	<b>1438</b>	r/min		
11	Rated current I <sub>N</sub>	<b>2.6</b>	A		
12	No-load current	<b>1.48</b>	A		
13	Starting current I <sub>s</sub> /I <sub>N</sub>	<b>7.9</b>		Fulfilled IEC 60034-12 design N,H	
14	Nominal torque T <sub>N</sub>	<b>7.3</b>	Nm		
15	Locked rotor torque T <sub>s</sub> /T <sub>N</sub>	<b>3.6</b>			
16	Maximum torque T <sub>max</sub> /T <sub>N</sub>	<b>4.2</b>			
17	Minimum torque T <sub>min</sub> /T <sub>N</sub>	<b>3.6</b>			
18	Speed at minimum torque	<b>75</b>	r/min		
Load characteristics (IEC 60034-2-1:2014)		Load %	Current A	Efficiency %	Power factor
19	PLL determined from residual loss	<b>100</b>	<b>2.6</b>	<b>84.1 / IE3</b>	<b>0.73</b>
20		<b>75</b>	<b>2.2</b>	<b>83.4</b>	<b>0.64</b>
21		<b>50</b>	<b>2</b>	<b>80.9</b>	<b>0.49</b>
22		<b>Start</b>	<b>20.4</b>		<b>0.63</b>
23	Maximum starting time from hot	<b>20</b>	s		
24	Maximum starting time from cold	<b>36</b>	s		
25	Insulation class / Temperature class	<b>F / B</b>			
26	Ambient temperature	<b>40</b>	°C		
27	Altitude	<b>1000</b>	m.a.s.l.		
28	Enclosure	<b>IP55</b>			
29	Cooling system	<b>IC411 self ventilated</b>			
30	Bearing DE/NDE	<b>6205-2Z/C3 - 6204-2Z/C3</b>			
31	Type of Grease				
32	Sound pressure level (LP dB(A) 1m)	<b>48</b>	dB(A)	at load	
33	Moment of inertia J = ¼ GD2	<b>0.00394</b>	kg-m2		
34	Balancing				
35	Vibration class				
36	Position of terminal box	<b>Top</b>			
37	Terminal box entries; no, dimens.				
38	Number of power terminals				
39	Direction of rotation	<b>CW or CCW</b>			
40	Weight of rotor	<b>5</b>	kg		
41	Total weight of motor	<b>23</b>	kg		
42	Dimension drawing no.				
43					
44					
45					
Ex-motors					
46					
47					
48					
Option Variant Codes / Definition					
49					
50					
51					
52					
Remarks:					
Data based on situation 15/08/2016					
All data subject to tolerances in accordance with IEC					
Guaranteed values on request					


Project	Location
---------	----------

Department/Author	Customer name	Customer ref.	Item name <b>1.0003</b>
-------------------	---------------	---------------	----------------------------

Our ref.	Rev/Changed by	Date of issue	Saving ident	Pages
	<b>A</b>	<b>21/11/2017</b>	<b>wimes stock.do2.xls</b>	<b>2(3)</b>

Product	<b>TEFC, 3-phase, squirrel cage induction motor</b>		
Type/Frame	<b>M2BAX 90SB 4</b>	Calc. ref.	<b>3GZC021009-105</b>
Product code	<b>3GBA 092 120-ASD</b>		
Rated output P <sub>N</sub>	<b>1.1</b>	kW	
Type of duty	<b>S1(IEC) 100%</b>		

Voltage (V)	<b>400</b>	Current I <sub>N</sub> (A)	<b>2.6</b>	Power factor at P <sub>N</sub>	<b>0.73</b>
Frequency (Hz)	<b>50</b>	Speed (r/min)	<b>1438</b>	Efficiency (%) at P <sub>N</sub>	<b>84.1</b>

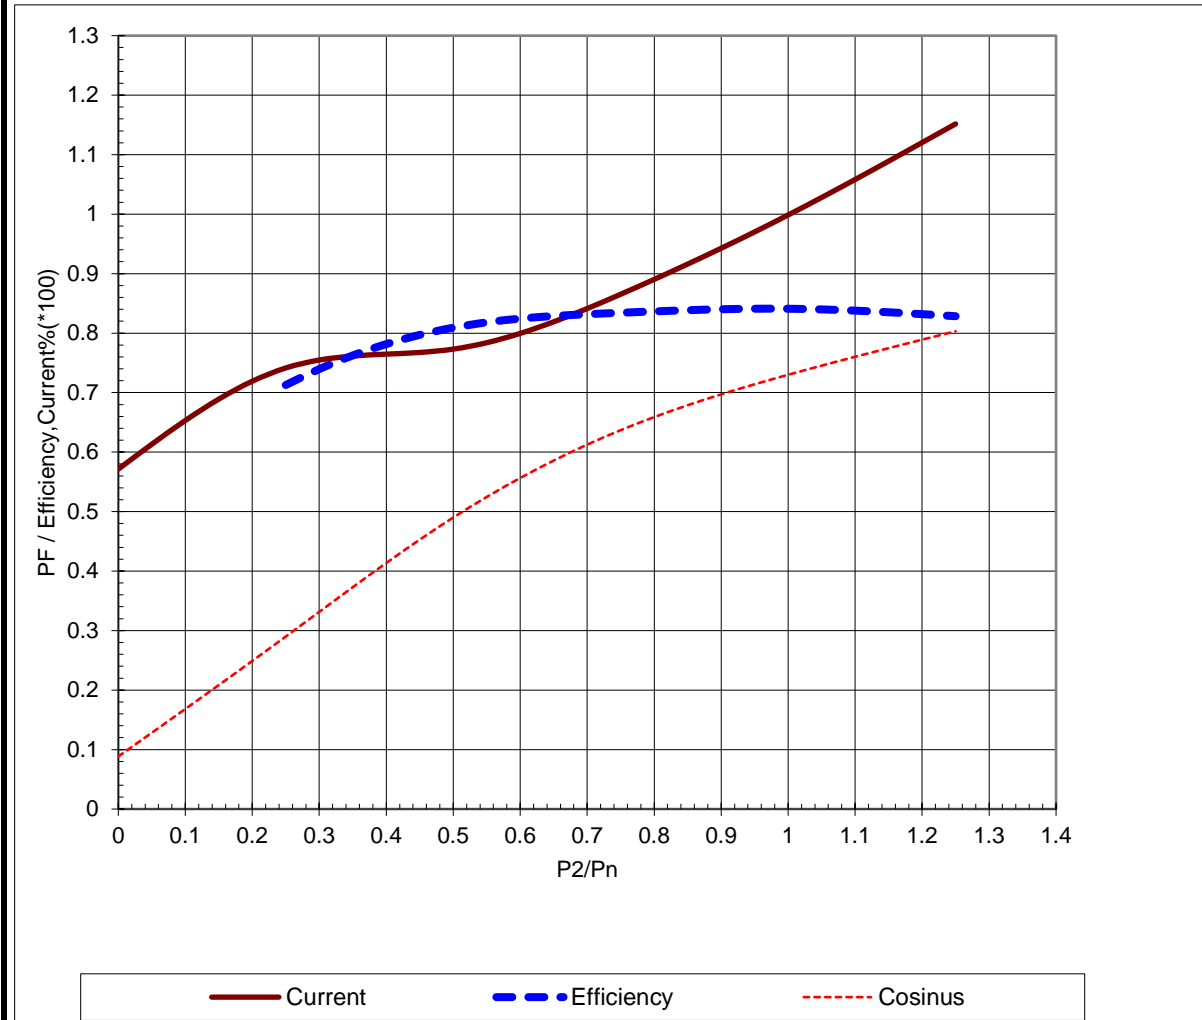

Load characteristics (IEC 60034-2-1:2014)


Data based on situation 15/08/2016

All data subject to tolerances in accordance with IEC

	Project	Location	
Department/Author	Customer name	Customer ref.	Item name <b>1.0003</b>
Our ref.	Rev/Changed b Date of issue <b>A 21/11/2017</b>	Saving ident <b>wimes stock.do2.xls</b>	Pages <b>3(3)</b>

Type of product	<b>TEFC, 3-phase, squirrel cage induction motor</b>		
Type/Frame	<b>M2BAX 90SB 4</b>	Calc. ref.	3GZC021009-105
Product code	<b>3GBA 092 120-ASD</b>	Frequency (Hz)	<b>50</b>
Rated output P <sub>N</sub>	<b>1.1 kW</b>	Rated current I <sub>N</sub>	<b>2.6 A</b>
Type of duty	<b>S1(IEC) 100%</b>		

J <sub>motor</sub> (kgm <sup>2</sup> )	<b>0.0039</b>	Voltage (V) 100%	<b>400</b>	Voltage (V)	<b>400V(100%)</b>
J <sub>load</sub> (kgm <sup>2</sup> )		T <sub>start</sub> /T <sub>N</sub>	<b>3.6</b>	T <sub>start</sub> /T <sub>N</sub>	<b>3.6</b>
Speed (r/min)	<b>1438</b>	Starting time (s)		Starting time (s)	
T <sub>N</sub> (Nm)	<b>7.3</b>	Speed (r/min)		Speed (r/min)	
T <sub>load</sub> (Nm)		I <sub>s</sub> /I <sub>n</sub>	<b>7.9</b>	I <sub>s</sub> /I <sub>n</sub>	<b>7.9</b>
Nbr. of Consecutive Starts at UN		T <sub>max</sub> /T <sub>n</sub>	<b>4.2</b>	T <sub>max</sub> /T <sub>n</sub>	<b>4.2</b>

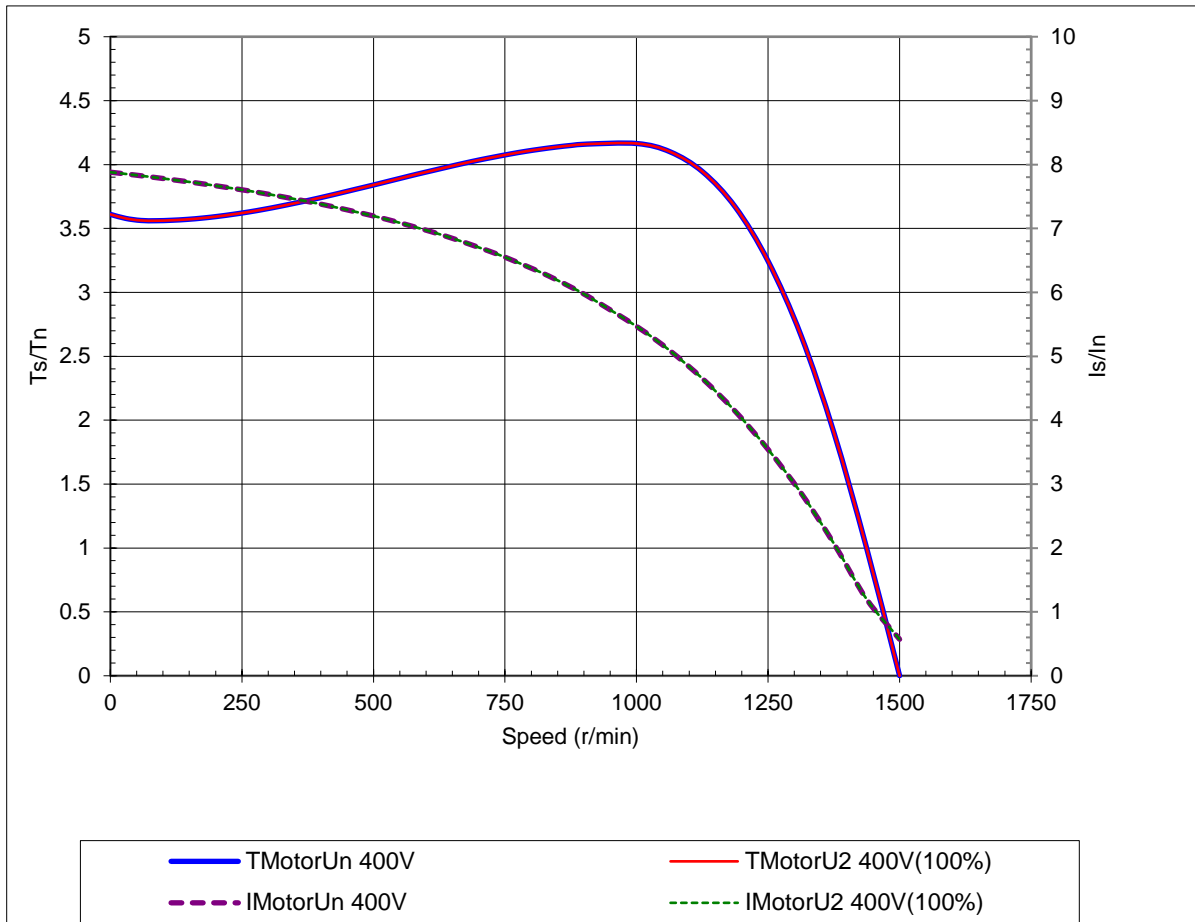

Load characteristics (IEC 60034-2-1:2014)  
Data based on situation 15/08/2016

All data subject to tolerances in accordance with IEC