

# Motor data sheet


## M3AA 132 S 6

Definition	Data	Unit	Remarks
Product code	3GAA 133 611-***J		
Voltage code	D		
Type/Frame	M3AA 132 S 6		
Design	CENELEC		
Efficiency class	IE3		
Rated output $P_N$	3	kW	
Rated voltage $U_N$	400	V D	± 5 % (IEC 60034-1)
Rated frequency $f_N$	50	Hz	± 2 % (IEC 60034-1)
Rated speed $n_N$	969	r/min	
Rated current $I_N$	6.7	A	
Starting current $I_S/I_N$	5.5		
Nominal torque $T_N$	29.5	Nm	
Locked rotor torque $T_l/T_N$	1.8		
Maximum torque $T_b/T_N$	3		
Efficiency - full load 100%	86.1	%	Acc. to IEC 60034-2-1
Efficiency - 75%	87.4	%	
Efficiency - 50%	86.7	%	
Power factor - full load 100%	0.75		
Bearing DE/NDE	6208-2Z/C3 6206-2Z/C3		
Sound pressure level $L_{pA}$ dB	57	dB(A)	+3dB(A)
Moment of inertia $J = \frac{1}{4} GD^2$ kgm <sup>2</sup>	0.03	kg-m <sup>2</sup>	
Weight	48	kg	

# Motor data sheet

## M3AA 132 S 6

### Running performance chart

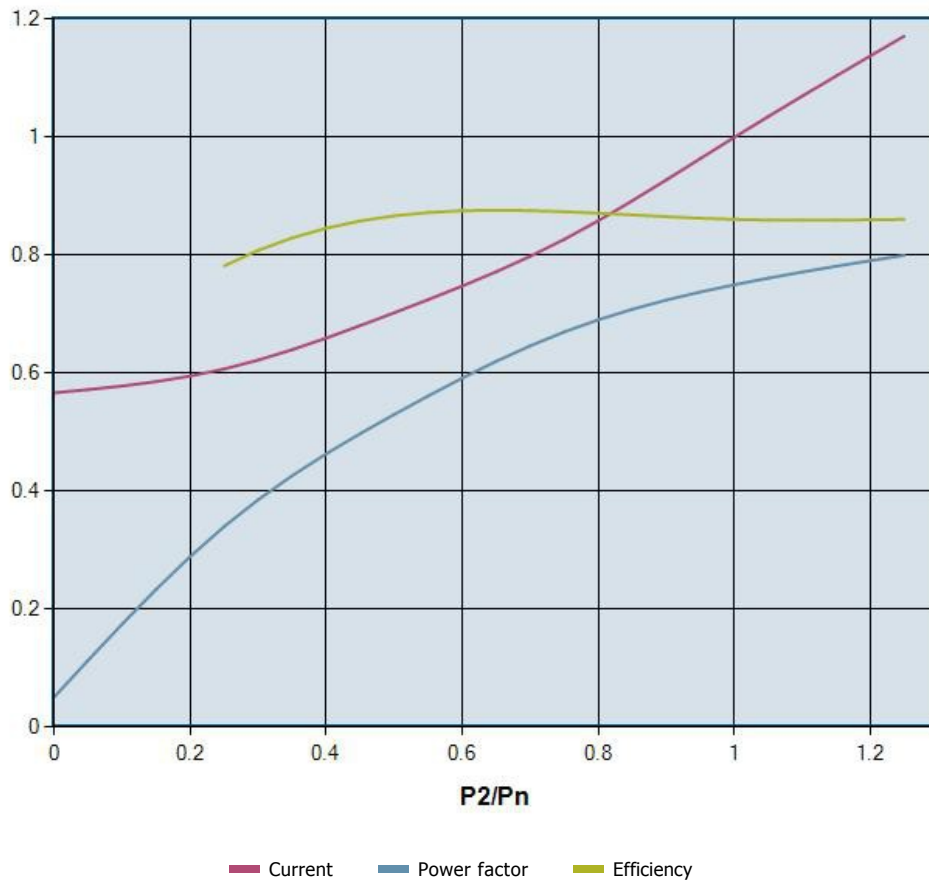

# Motor data sheet

## M3AA 132 S 6

### Starting performance chart information

