




A

B


C

D

E

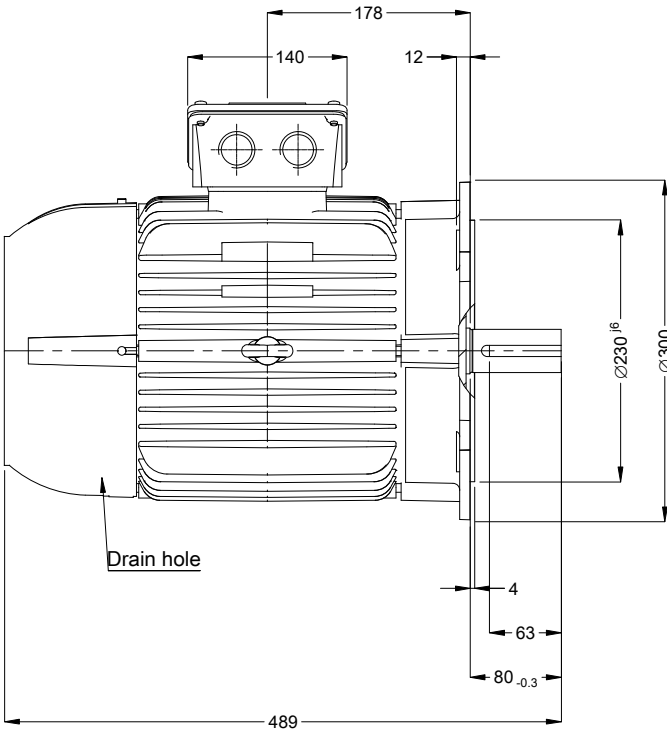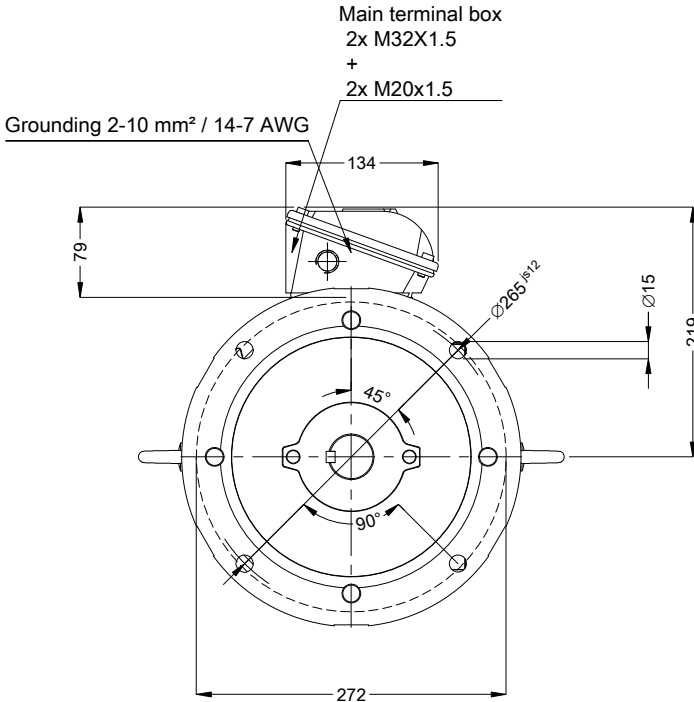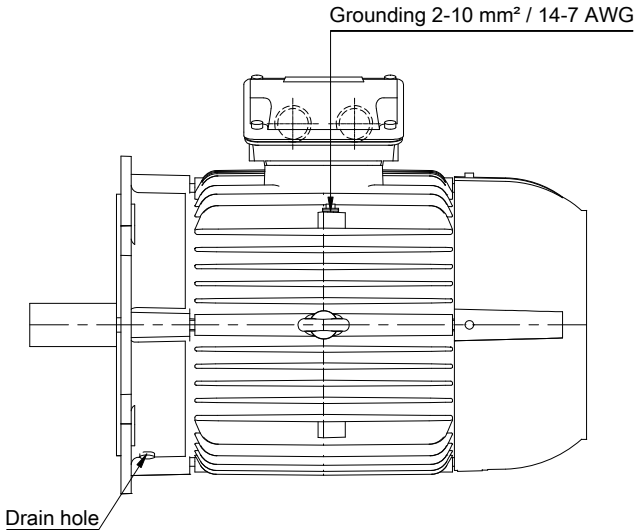

Space heaters 110-127 V / 200-240 V
Double grounding
Bearing cap
Thermal protection to switch off - thermistors 155°C
Color RAL 5009
Painting plan 202P
Mounting B5T



7.5 kW 04 Poles 50 Hz A

				Scale				2 : 13	
					HYBRISUSER				00
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR W22 IE3 FRAME 132M IP55 TEFC			PREVIEW WDD 00 SHEET 1 / 1 			
CHECKED									
RELEASED									
REL. DATE									