

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

Frame : 80
Insulation class : F
Duty cycle : S1
Ambient temperature : -20°C to +40°C
Altitude : 1000 m.a.s.l.
Protection degree : IP55
Design : N

Cooling method : IC411 - TEFC
Mounting : B5T
Rotation¹ : Both (CW and CCW)
Starting method : Direct On Line
Approx. weight³ : 15.7 kg
Moment of inertia (J) : 0.0027 kgm²

Output [kW]	0.55	0.55	0.55	0.55
Poles	4	4	4	4
Frequency [Hz]	50	50	50	60
Rated voltage [V]	220/380	230/400	240/415	460
Rated current [A]	2.16/1.25	2.14/1.23	2.13/1.23	1.09
L. R. Amperes [A]	13.6/7.88	14.1/8.12	14.7/8.49	8.28
LRC [A]	6.3	6.6	6.9	7.6
No load current [A]	1.19/0.690	1.34/0.770	1.45/0.840	0.710
Rated speed [RPM]	1420	1430	1435	1740
Slip [%]	5.33	4.67	4.33	3.33
Rated torque [kgfm]	0.377	0.375	0.373	0.308
Locked rotor torque [%]	250	280	310	350
Breakdown torque [%]	250	280	310	350
Service factor	1.00	1.00	1.00	1.00
Temperature rise	80 K	80 K	80 K	80 K
Locked rotor time	41s (cold) 23s (hot)	39s (cold) 22s (hot)	36s (cold) 20s (hot)	37s (cold) 21s (hot)
Noise level ²	44.0 dB(A)	44.0 dB(A)	44.0 dB(A)	48.0 dB(A)
Efficiency (%)	25%			
	50%	78.0	77.0	77.0
	75%	79.1	79.0	80.0
	100%	80.8	80.8	81.5
Power Factor	25%			
	50%	0.64	0.61	0.57
	75%	0.76	0.73	0.70
	100%	0.83	0.80	0.77

Losses at normative operating points (speed;torque), in percentage of rated output power

Losses (%)	P1 (0,9;1,0)	23.7	23.7	23.7	22.6
	P2 (0,5;1,0)	21.9	21.9	21.9	20.9
	P3 (0,25;1,0)	20.3	20.3	20.3	19.4
	P4 (0,9;0,5)	12.1	12.1	12.1	11.6
	P5 (0,5;0,5)	8.7	8.7	8.7	8.3
	P6 (0,5;0,25)	6.2	6.2	6.2	5.9
	P7 (0,25;0,25)	4.4	4.4	4.4	4.2

Bearing type : Drive end 6204 ZZ Non drive end 6203 ZZ
Sealing : V'Ring V'Ring
Lubrication interval : - -
Lubricant amount : - -
Lubricant type : Mobil Polyrex EM

Foundation loads
Max. traction : 26 kgf
Max. compression : 42 kgf

This revision replaces and cancel the previous one, which must be eliminated.

- (1) Looking the motor from the shaft end.
- (2) Measured at 1m and with tolerance of +3dB(A).
- (3) Approximate weight subject to changes after manufacturing process.
- (4) At 100% of full load.

These are average values based on tests with sinusoidal power supply, subject to the tolerances stipulated in IEC 60034-1.

Rev.	Changes Summary	Performed	Checked	Date
Performed by				
Checked by				
Date	17/09/2025			

Page 1 / 19
Revision

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer : _____

Notes

Rev.	Changes Summary		Performed	Checked	Date
Performed by			Page		Revision
Checked by					
Date	17/09/2025				
			2 / 19		

DATA SHEET

Three Phase Induction Motor - Squirrel Cage



Customer :

Thermal protection

ID	Application	Type	Quantity	Sensing Temperature
1	Winding	Thermistor - 2 wires	1 x Phase	155 °C

Space heater information

Voltage: 110 - 127 V

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 3 / 19		Revision
Checked by				
Date	17/09/2025			

TORQUE AND CURRENT VS SPEED CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

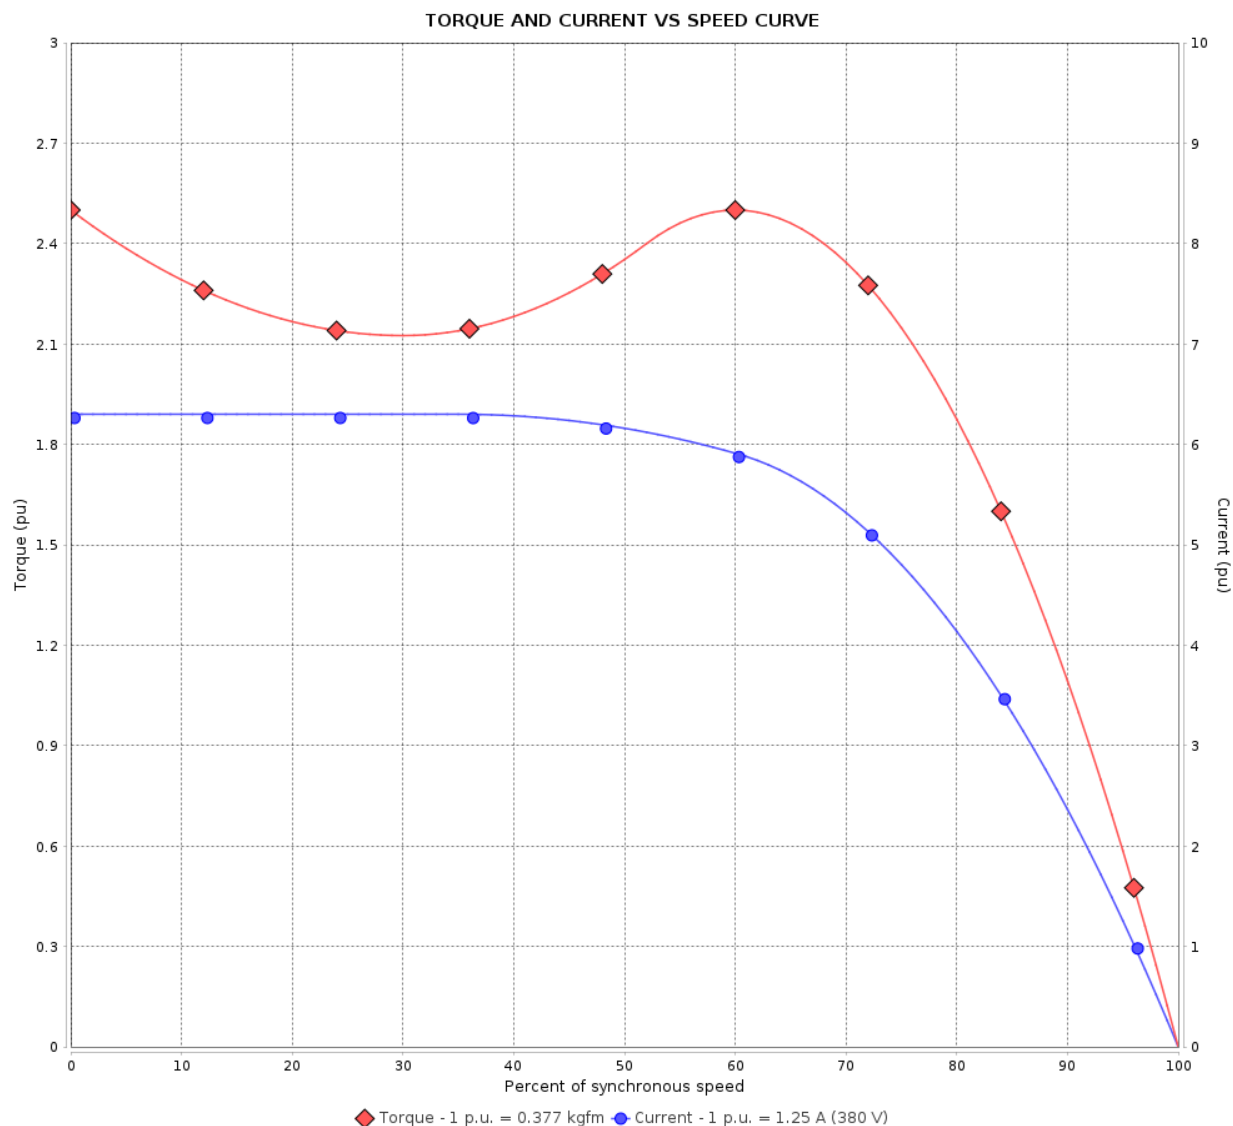

Performance : 220/380 V 50 Hz 4P

Rated current : 2.16/1.25 A
LRC : 6.3
Rated torque : 0.377 kgfm
Locked rotor torque : 250 %
Breakdown torque : 250 %
Rated speed : 1420 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Locked rotor time : 41s (cold) 23s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 4 / 19Revision		
Checked by				
Date	17/09/2025			

TORQUE AND CURRENT VS SPEED CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

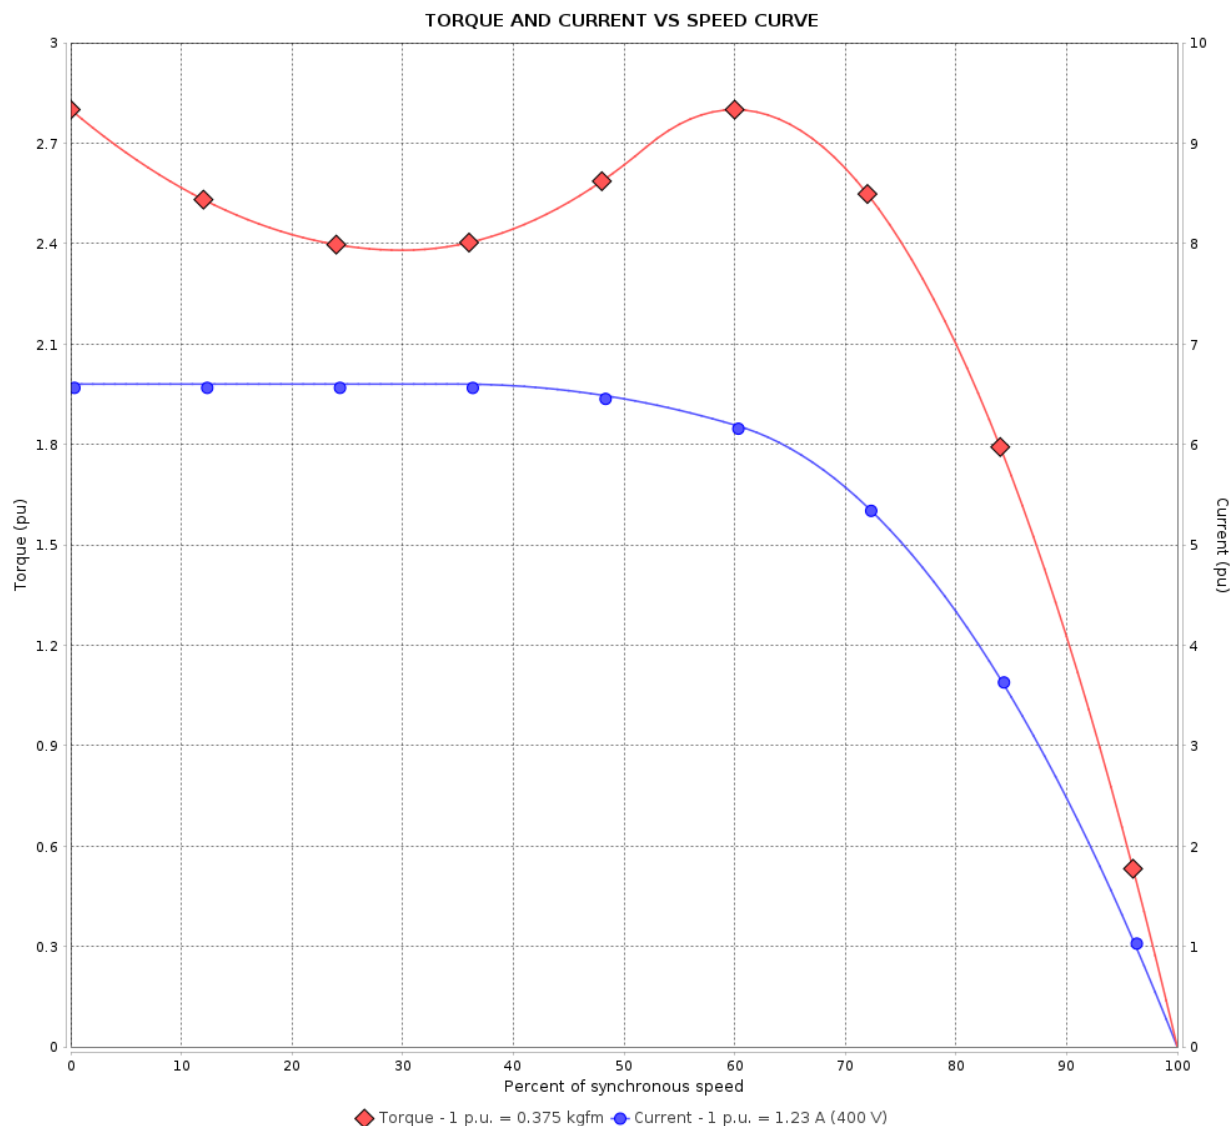

Performance : 230/400 V 50 Hz 4P

Rated current : 2.14/1.23 A
LRC : 6.6
Rated torque : 0.375 kgfm
Locked rotor torque : 280 %
Breakdown torque : 280 %
Rated speed : 1430 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Locked rotor time : 39s (cold) 22s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 5 / 19Revision		
Checked by				
Date	17/09/2025			

TORQUE AND CURRENT VS SPEED CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

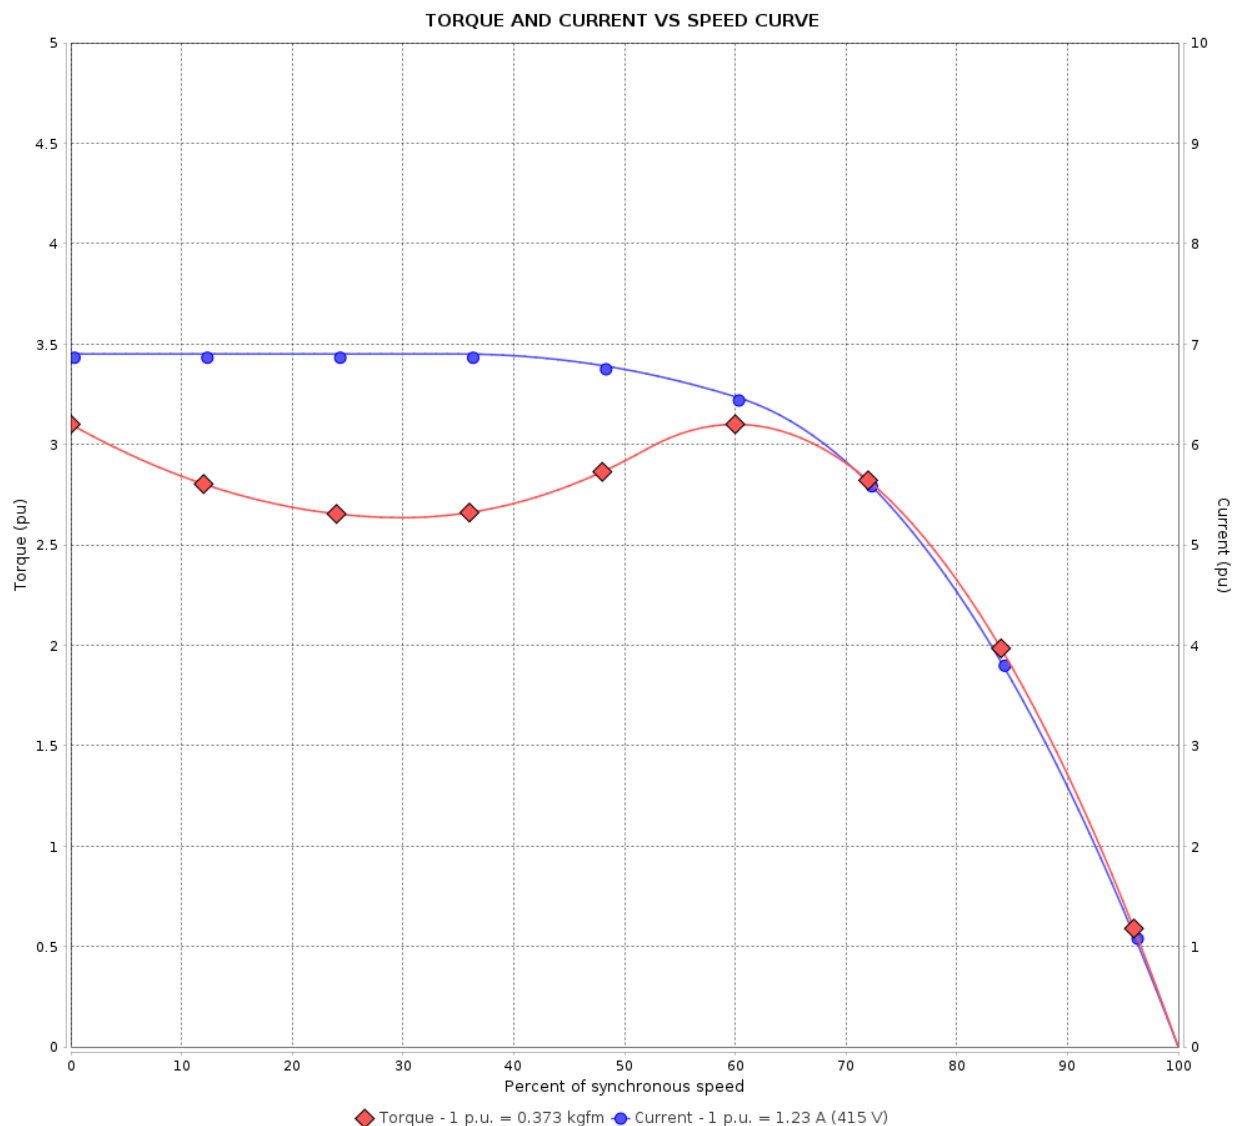

Performance : 240/415 V 50 Hz 4P

Rated current : 2.13/1.23 A
LRC : 6.9
Rated torque : 0.373 kgfm
Locked rotor torque : 310 %
Breakdown torque : 310 %
Rated speed : 1435 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Locked rotor time : 36s (cold) 20s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 6 / 19Revision		
Checked by				
Date	17/09/2025			

TORQUE AND CURRENT VS SPEED CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

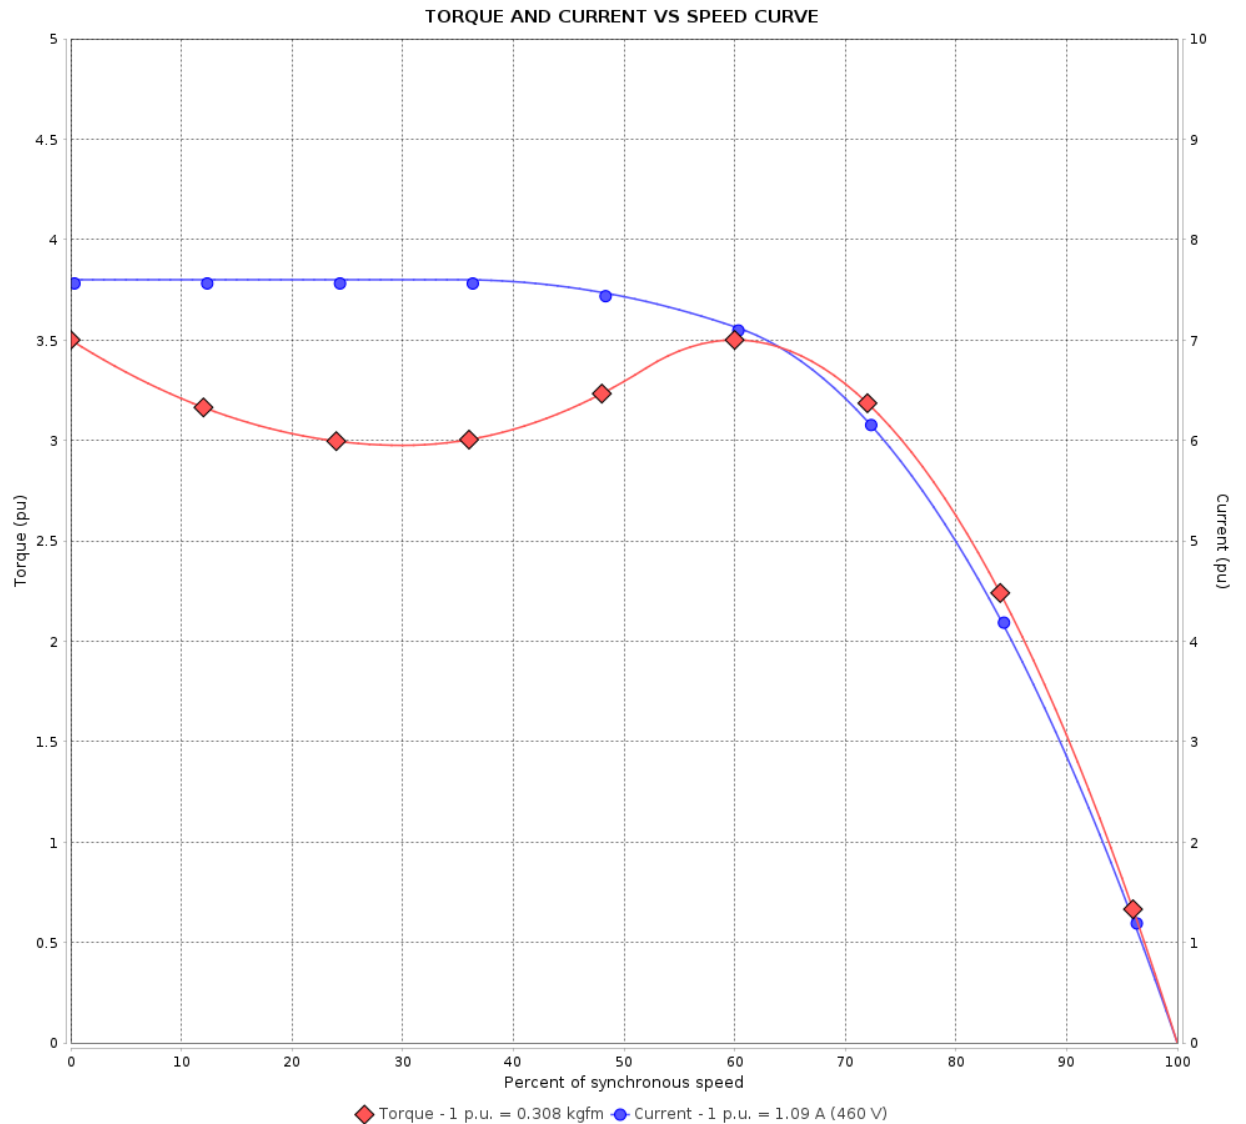

Performance : 460 V 60 Hz 4P

Rated current	: 1.09 A	Moment of inertia (J)	: 0.0027 kgm ²
LRC	: 7.6	Duty cycle	: S1
Rated torque	: 0.308 kgfm	Insulation class	: F
Locked rotor torque	: 350 %	Service factor	: 1.00
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 1740 rpm	Design	: N

Locked rotor time : 37s (cold) 21s (hot)

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 7 / 19Revision		
Checked by				
Date	17/09/2025			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

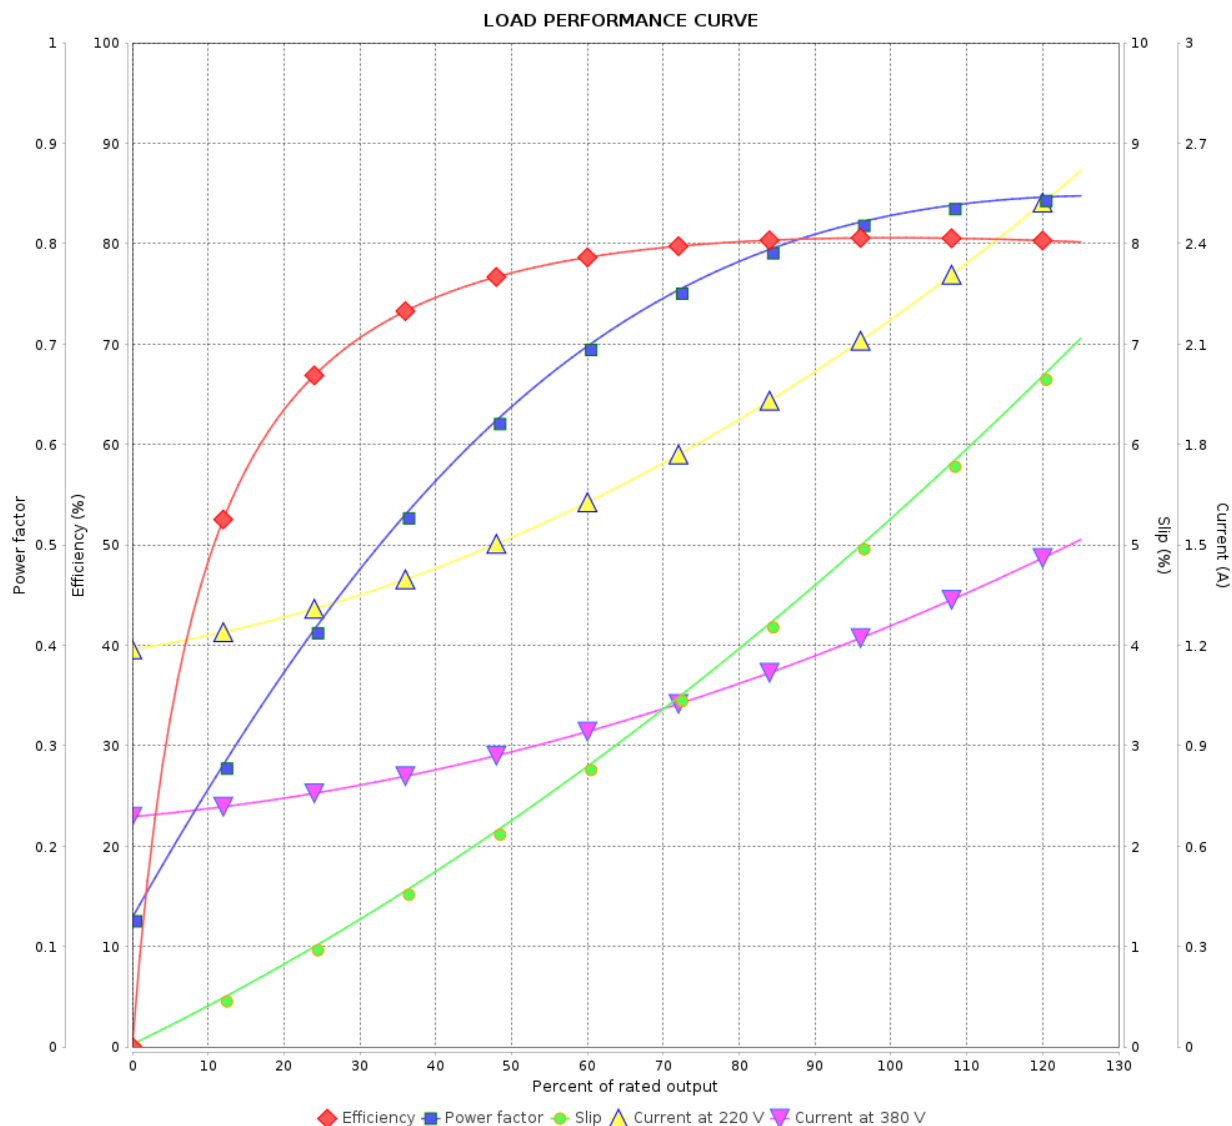

Performance : 220/380 V 50 Hz 4P

Rated current : 2.16/1.25 A
LRC : 6.3
Rated torque : 0.377 kgfm
Locked rotor torque : 250 %
Breakdown torque : 250 %
Rated speed : 1420 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 8 / 19Revision		
Checked by				
Date	17/09/2025			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

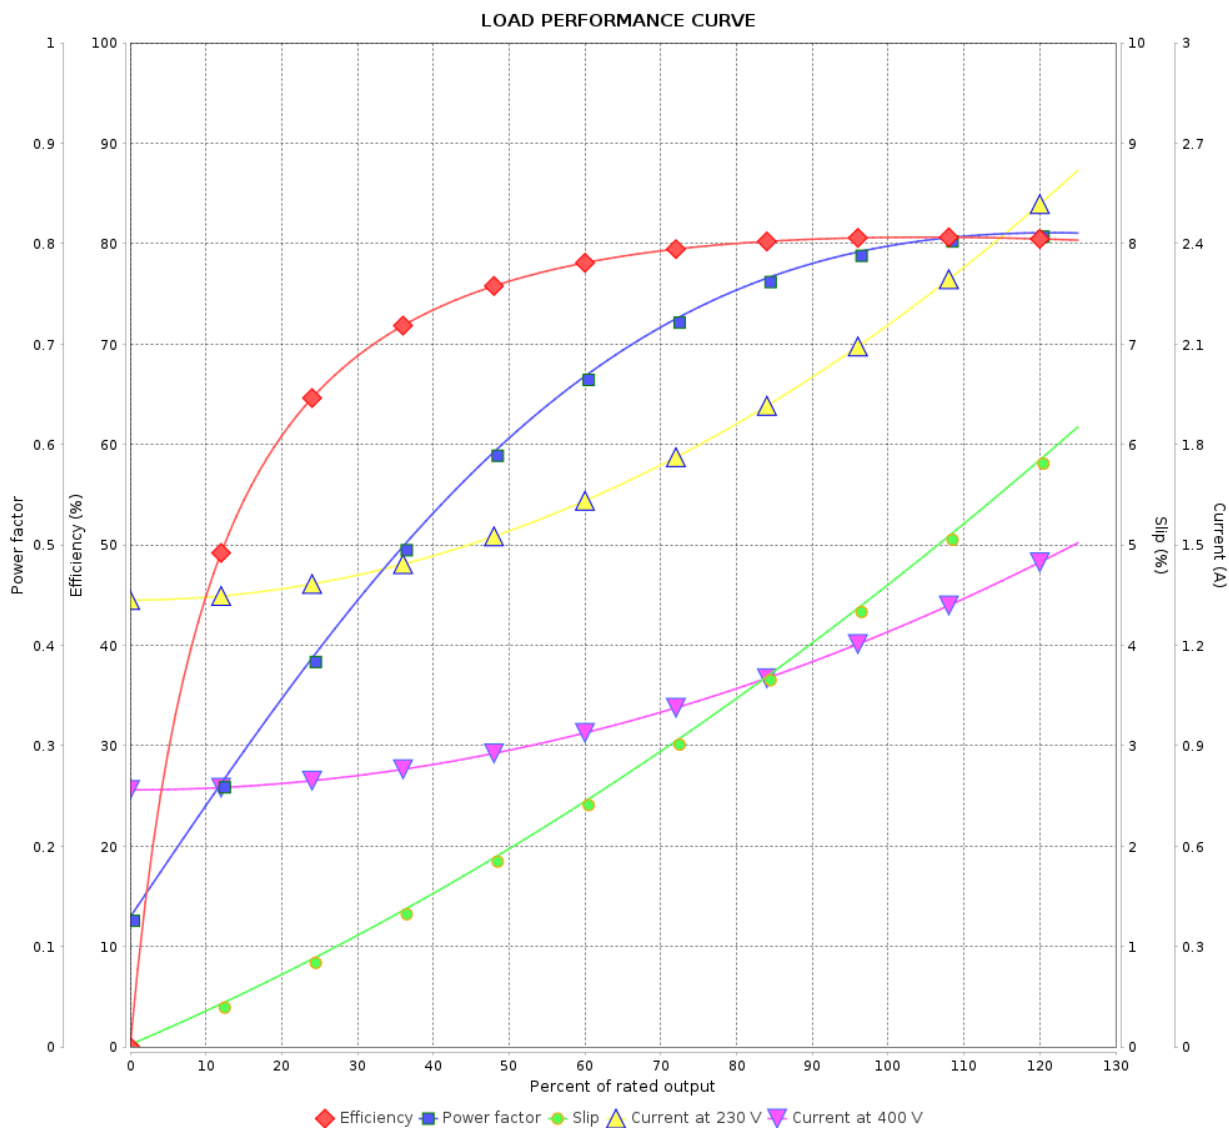

Performance : 230/400 V 50 Hz 4P

Rated current : 2.14/1.23 A
LRC : 6.6
Rated torque : 0.375 kgfm
Locked rotor torque : 280 %
Breakdown torque : 280 %
Rated speed : 1430 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 9 / 19Revision		
Checked by				
Date	17/09/2025			

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

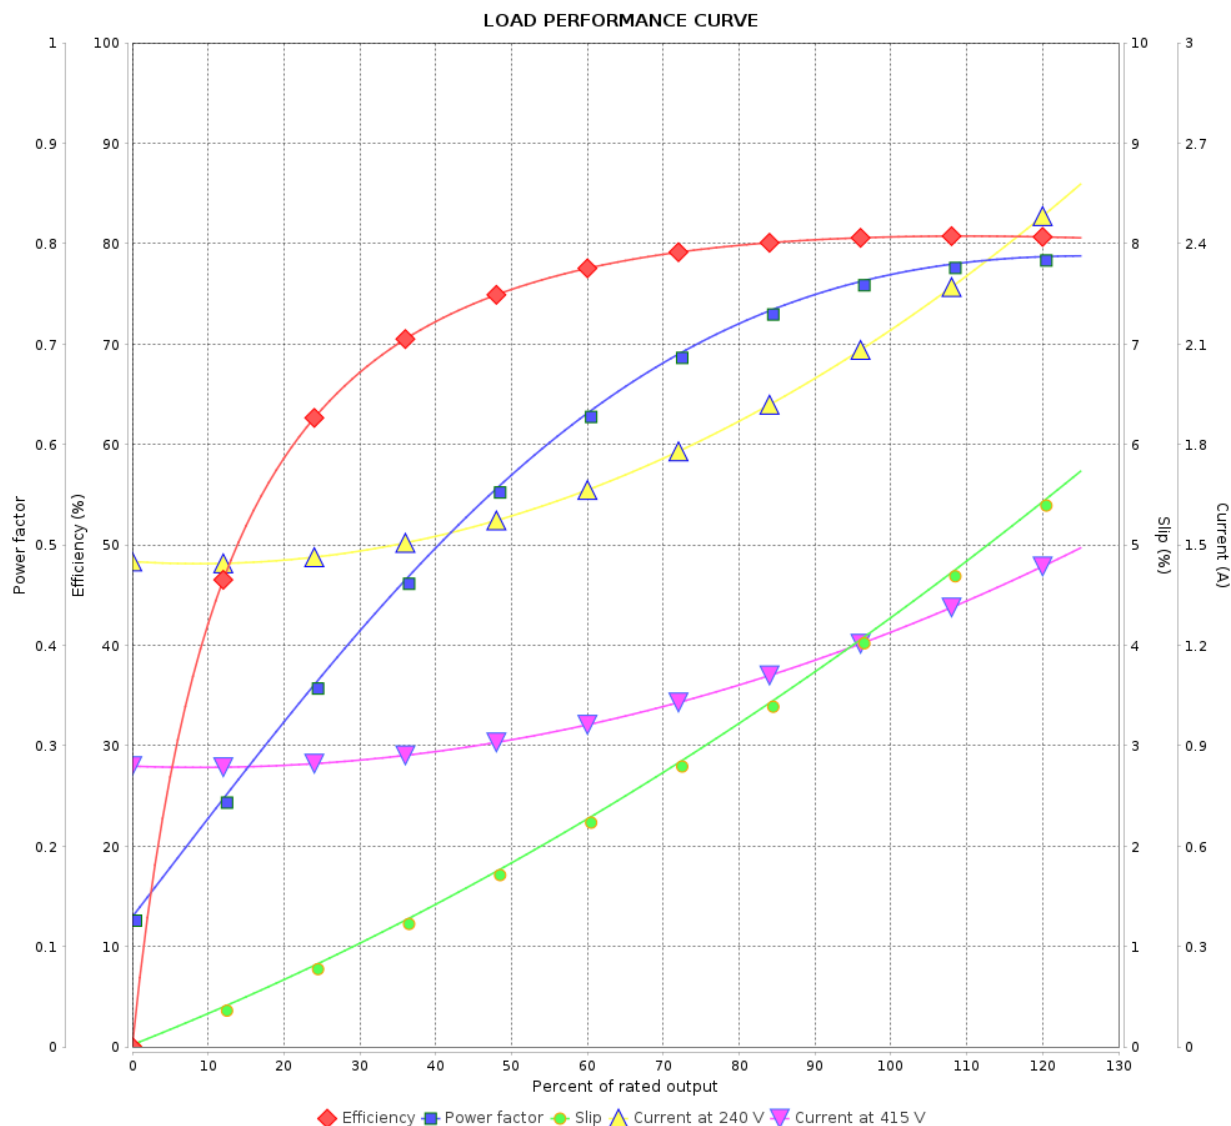

Performance : 240/415 V 50 Hz 4P

Rated current : 2.13/1.23 A
LRC : 6.9
Rated torque : 0.373 kgfm
Locked rotor torque : 310 %
Breakdown torque : 310 %
Rated speed : 1435 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				10 / 19	
Date					
	17/09/2025				

LOAD PERFORMANCE CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

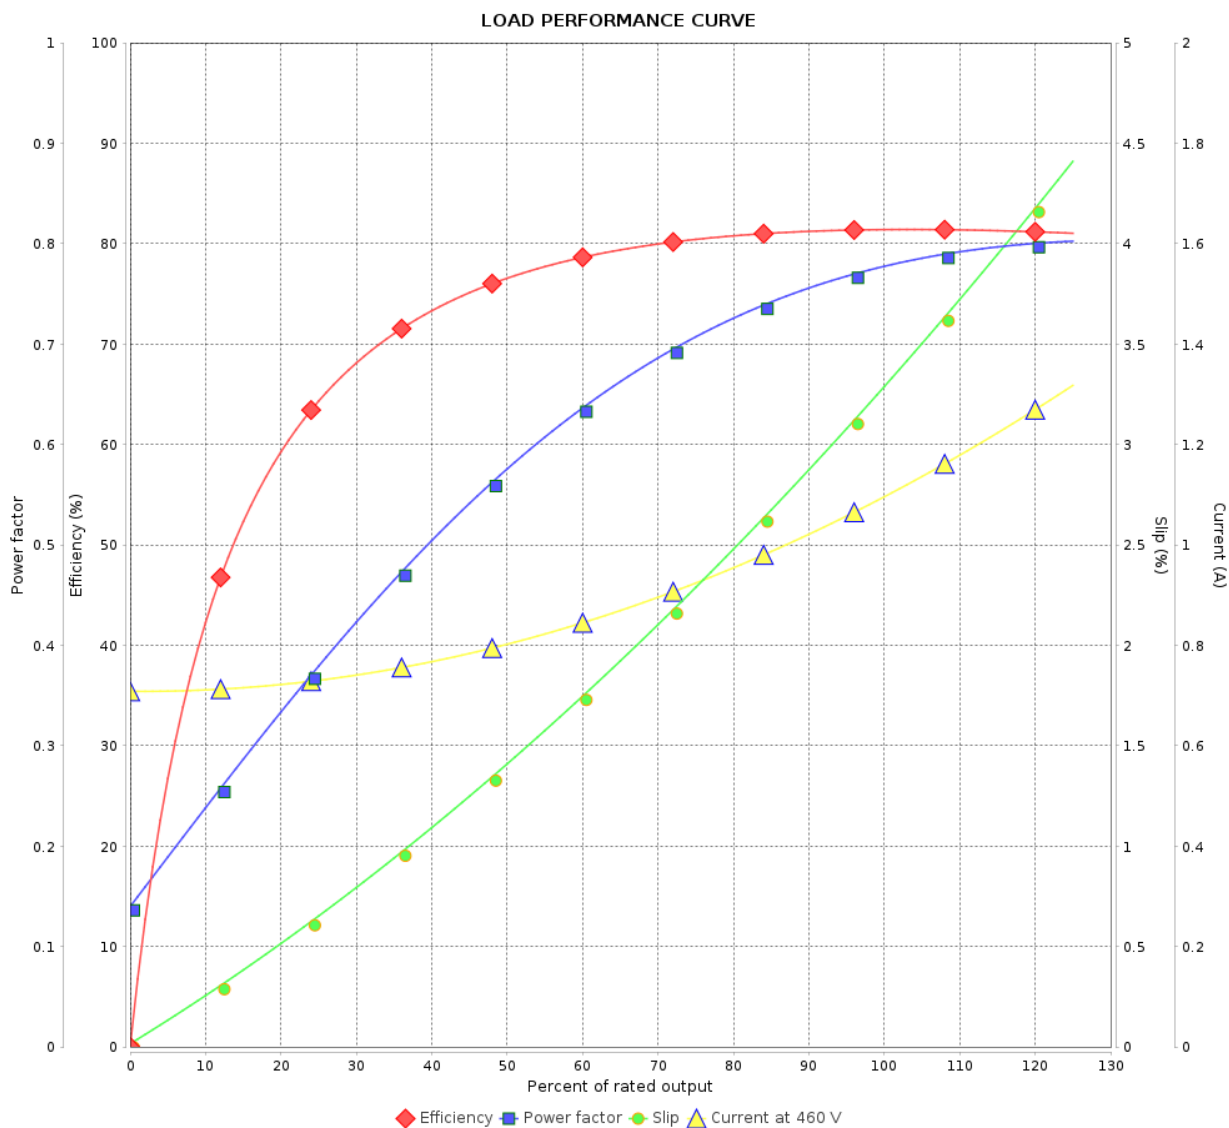

Performance : 460 V 60 Hz 4P

Rated current : 1.09 A
LRC : 7.6
Rated torque : 0.308 kgfm
Locked rotor torque : 350 %
Breakdown torque : 350 %
Rated speed : 1740 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 11 / 19Revision		
Checked by				
Date	17/09/2025			

THERMAL LIMIT CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

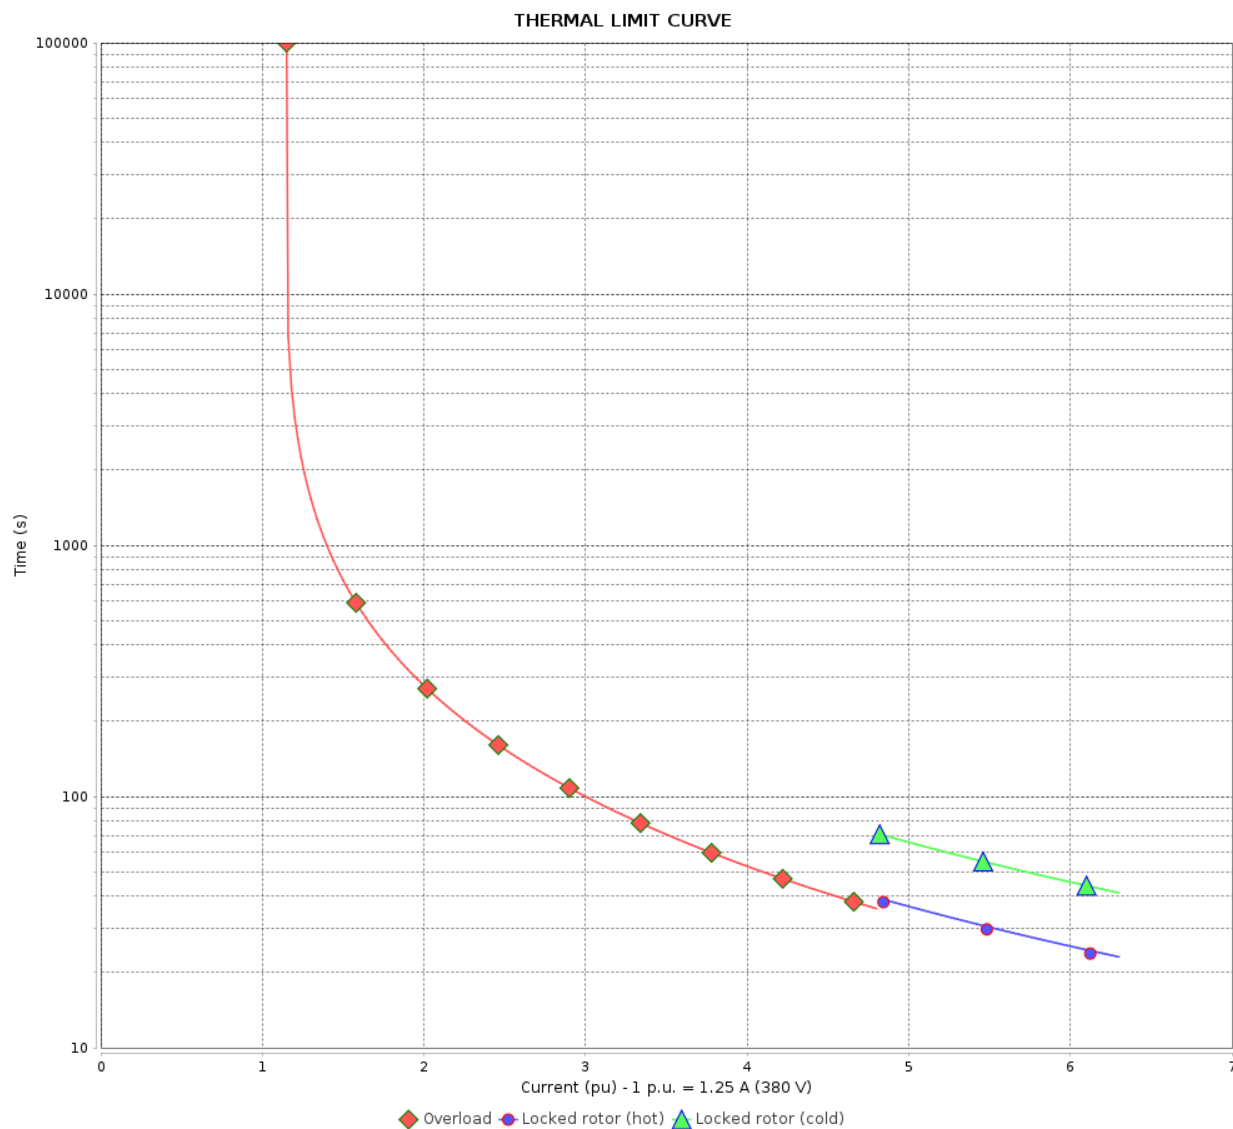

Performance : 220/380 V 50 Hz 4P

Rated current : 2.16/1.25 A
LRC : 6.3
Rated torque : 0.377 kgfm
Locked rotor torque : 250 %
Breakdown torque : 250 %
Rated speed : 1420 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Heating constant

Cooling constant

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				12 / 19	
Date					

THERMAL LIMIT CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

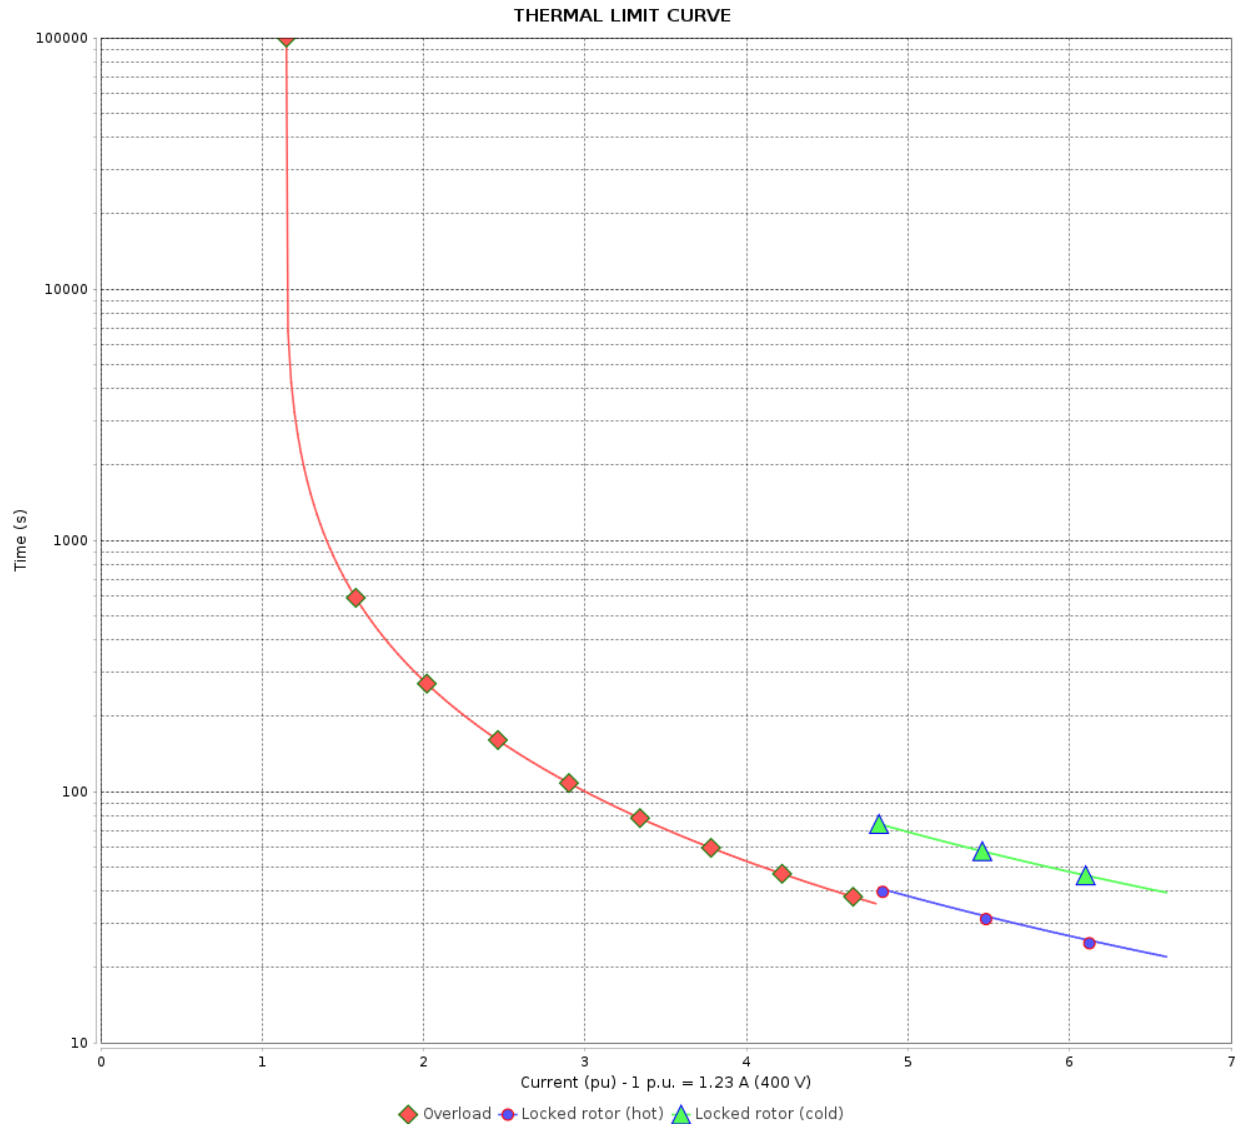

Performance : 230/400 V 50 Hz 4P

Rated current : 2.14/1.23 A
 LRC : 6.6
 Rated torque : 0.375 kgfm
 Locked rotor torque : 280 %
 Breakdown torque : 280 %
 Rated speed : 1430 rpm

Moment of inertia (J) : 0.0027 kgm²
 Duty cycle : S1
 Insulation class : F
 Service factor : 1.00
 Temperature rise : 80 K
 Design : N

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page Revision		
Checked by				
Date	17/09/2025			

This document is exclusive property of WEG S/A. Reprinting is not allowed without written authorization of WEG S/A.

Subject to change without notice

THERMAL LIMIT CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

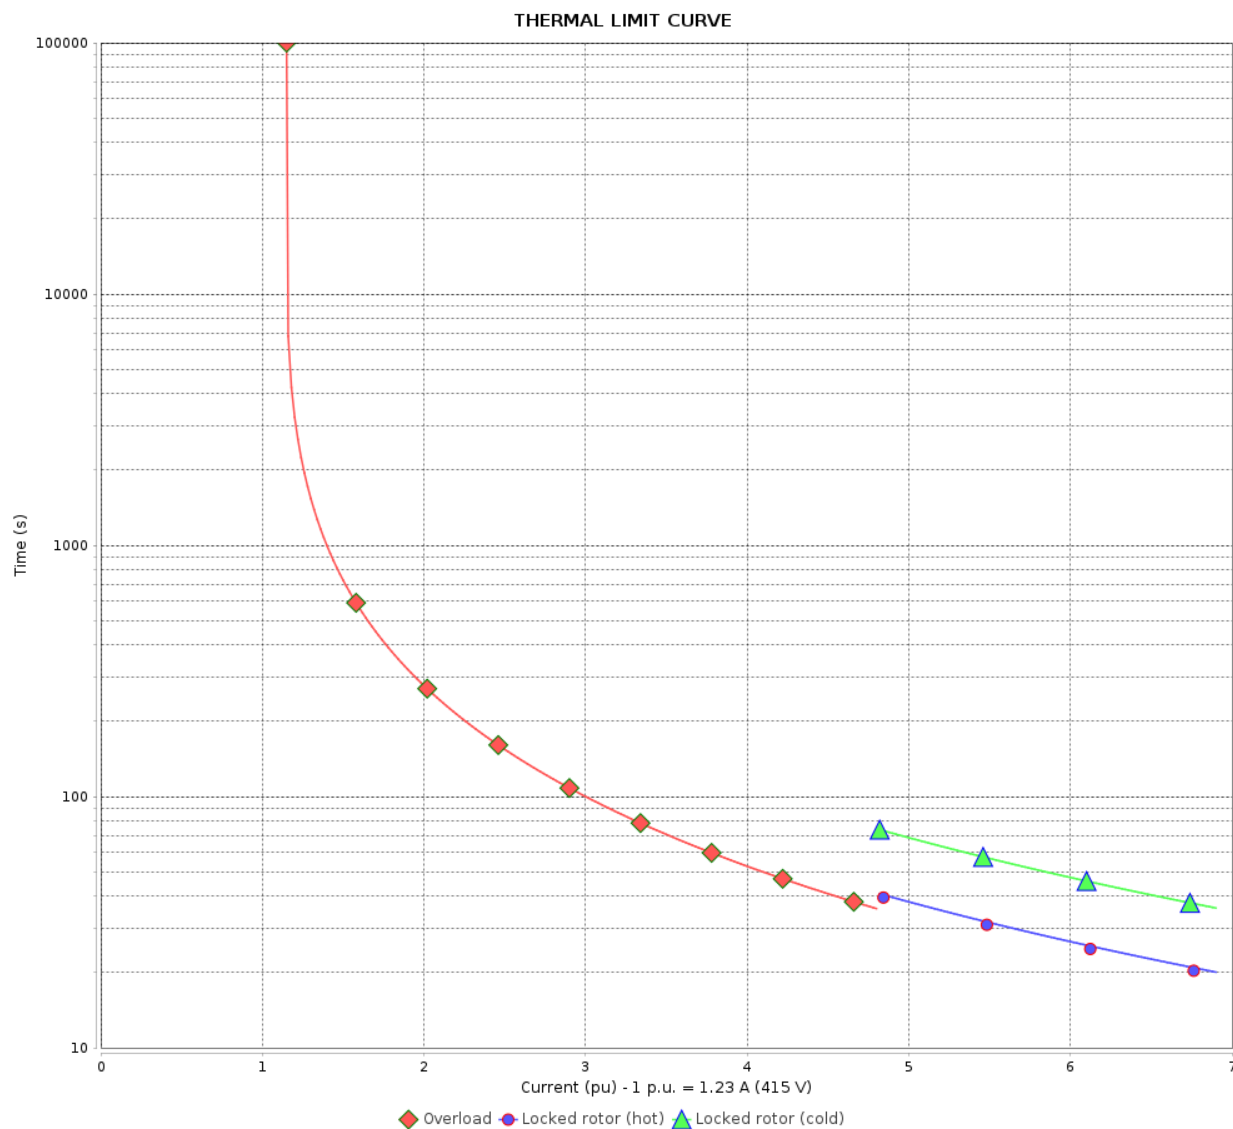

Performance : 240/415 V 50 Hz 4P

Rated current : 2.13/1.23 A
LRC : 6.9
Rated torque : 0.373 kgfm
Locked rotor torque : 310 %
Breakdown torque : 310 %
Rated speed : 1435 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Heating constant

Cooling constant

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				14 / 19	
Date					
	17/09/2025				

THERMAL LIMIT CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

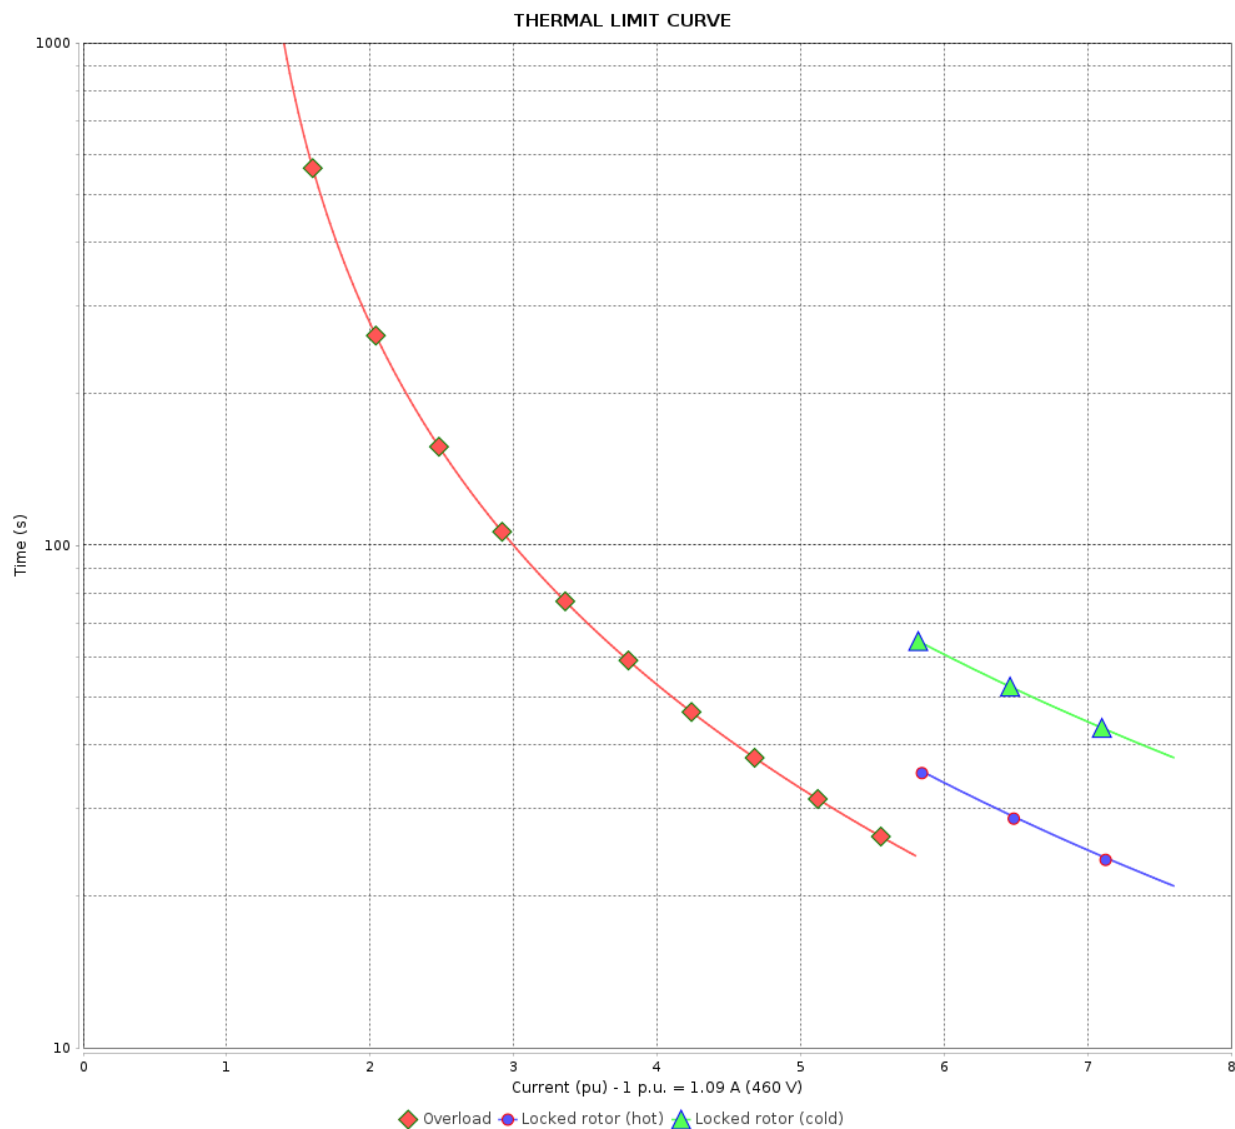

Performance : 460 V 60 Hz 4P

Rated current : 1.09 A
LRC : 7.6
Rated torque : 0.308 kgfm
Locked rotor torque : 350 %
Breakdown torque : 350 %
Rated speed : 1740 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Heating constant

Cooling constant

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 15 / 19Revision		
Checked by				
Date	17/09/2025			

VFD OPERATION CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

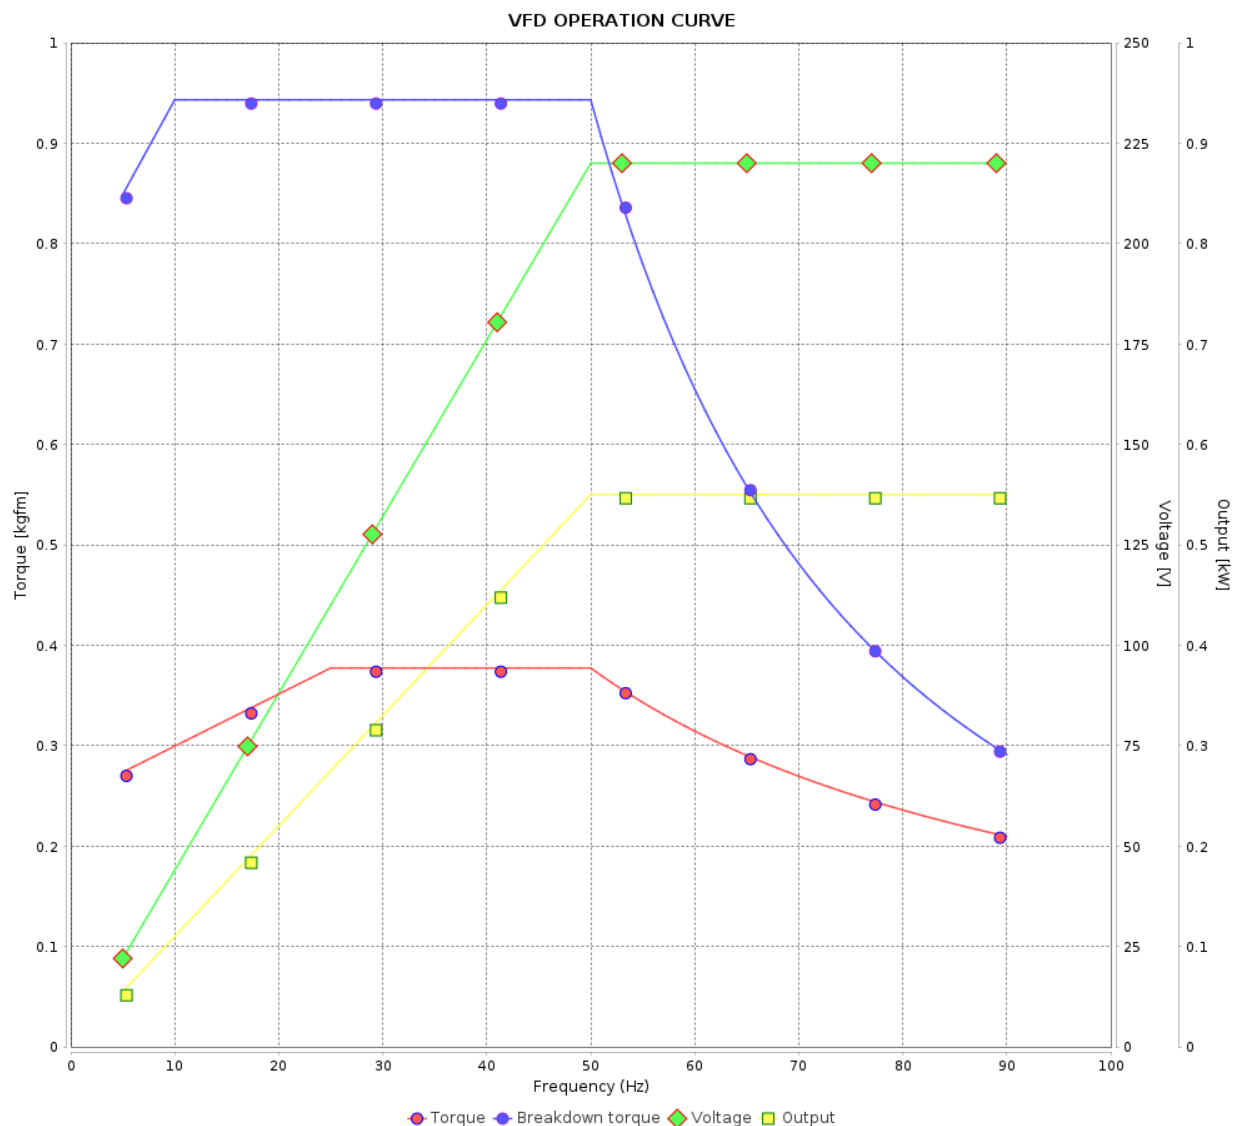

Performance : 220/380 V 50 Hz 4P

Rated current : 2.16/1.25 A
LRC : 6.3
Rated torque : 0.377 kgfm
Locked rotor torque : 250 %
Breakdown torque : 250 %
Rated speed : 1420 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				16 / 19	
Date					
	17/09/2025				

VFD OPERATION CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

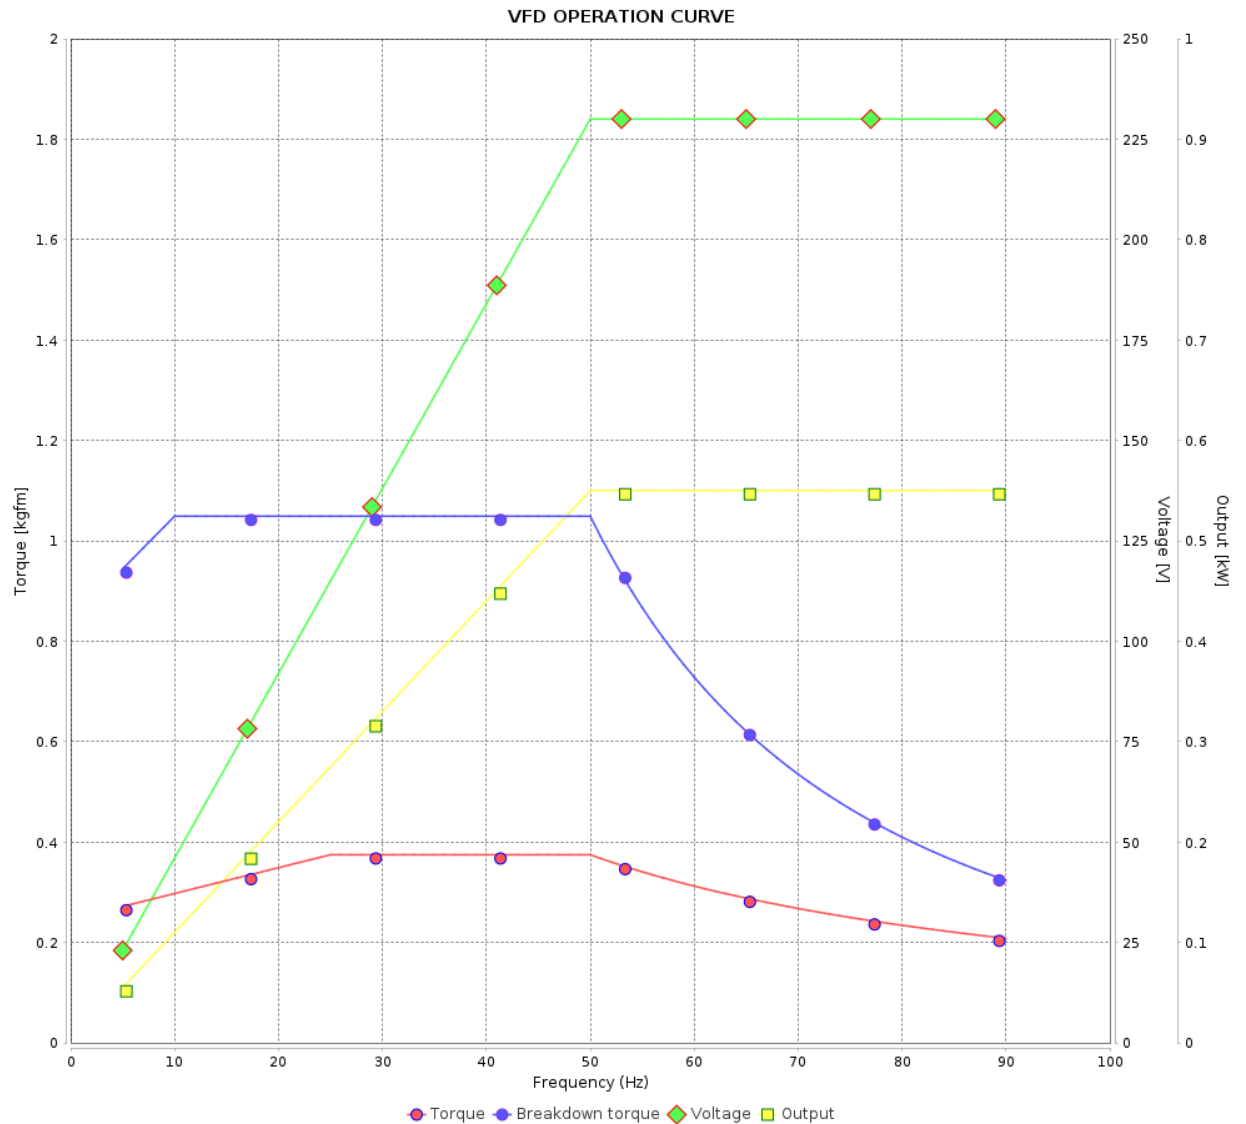

Performance : 230/400 V 50 Hz 4P

Rated current : 2.14/1.23 A
LRC : 6.6
Rated torque : 0.375 kgfm
Locked rotor torque : 280 %
Breakdown torque : 280 %
Rated speed : 1430 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page 17 / 19	Revision
Checked by					
Date	17/09/2025				

VFD OPERATION CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

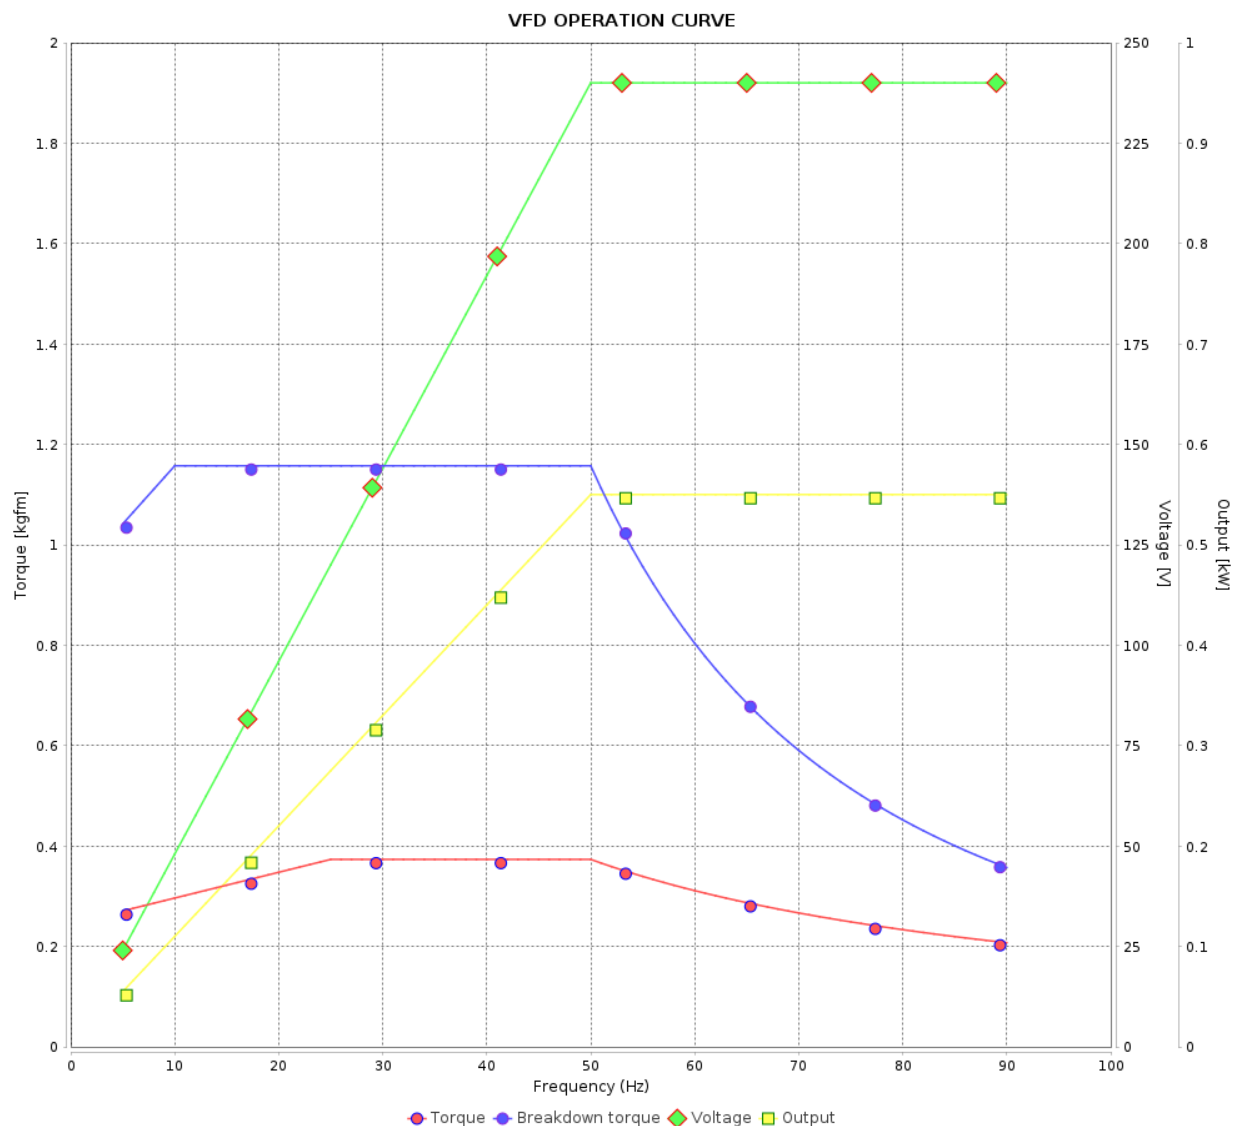

Performance : 240/415 V 50 Hz 4P

Rated current : 2.13/1.23 A
LRC : 6.9
Rated torque : 0.373 kgfm
Locked rotor torque : 310 %
Breakdown torque : 310 %
Rated speed : 1435 rpm

Moment of inertia (J) : 0.0027 kgm²
Duty cycle : S1
Insulation class : F
Service factor : 1.00
Temperature rise : 80 K
Design : N

Rev.	Changes Summary		Performed	Checked	Date
Performed by				Page	Revision
Checked by				18 / 19	
Date					
	17/09/2025				

VFD OPERATION CURVE


Three Phase Induction Motor - Squirrel Cage



Customer :

Product line : W22 IE3 Three-Phase

Product code : 15839432

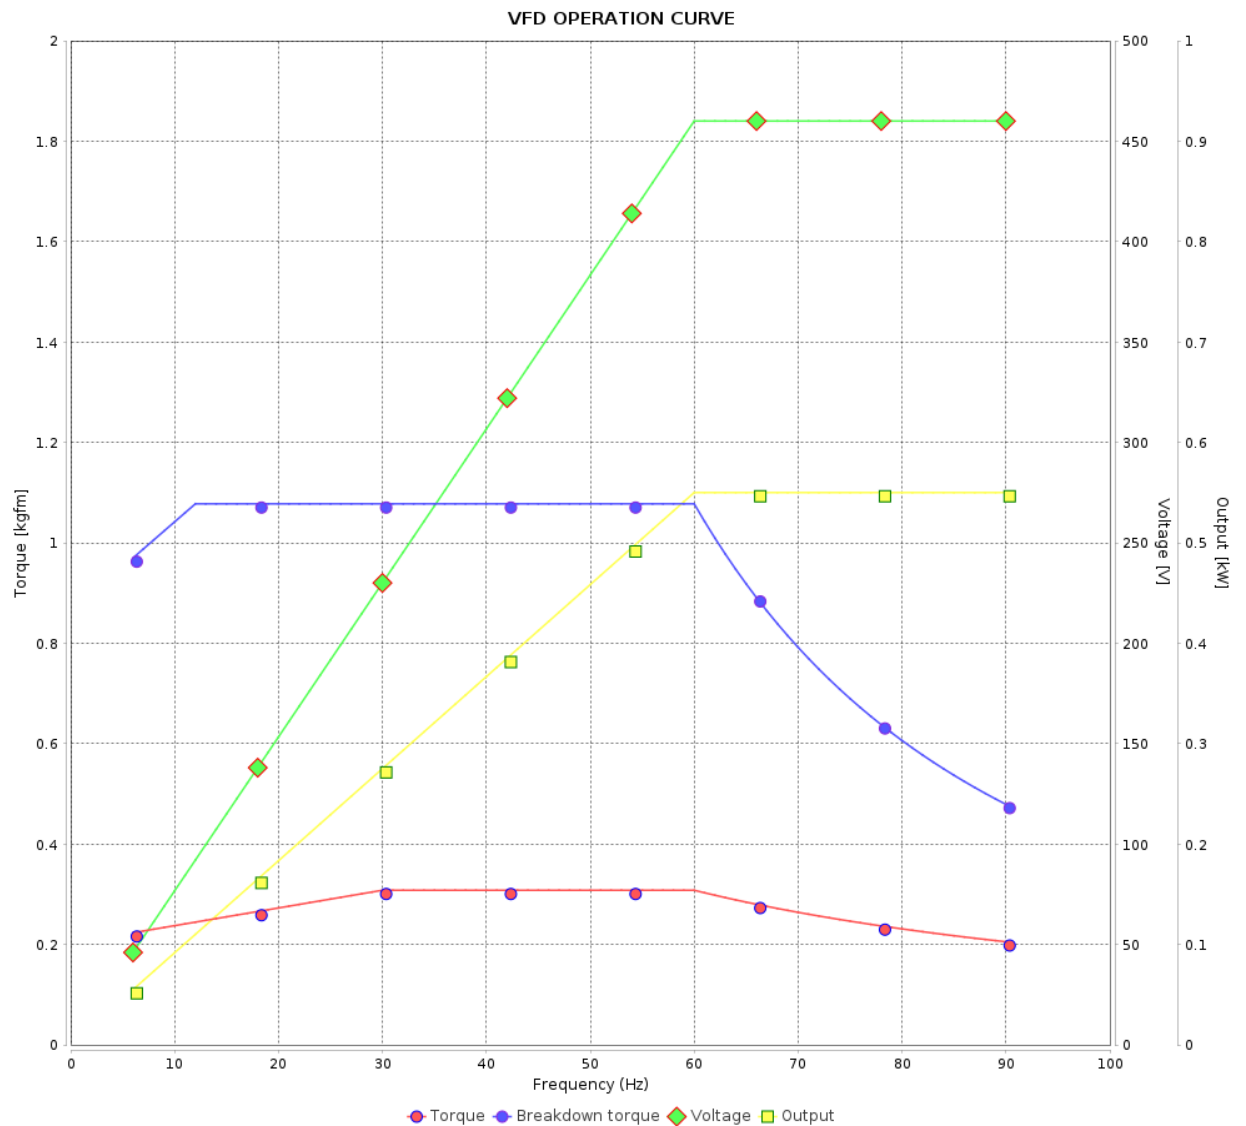

Performance : 460 V 60 Hz 4P

Rated current	: 1.09 A	Moment of inertia (J)	: 0.0027 kgm ²
LRC	: 7.6	Duty cycle	: S1
Rated torque	: 0.308 kgfm	Insulation class	: F
Locked rotor torque	: 350 %	Service factor	: 1.00
Breakdown torque	: 350 %	Temperature rise	: 80 K
Rated speed	: 1740 rpm	Design	: N

Rev.	Changes Summary	Performed	Checked	Date
Performed by		Page 19 / 19Revision		
Checked by				
Date	17/09/2025			