


ABB Motors and Generators		Technical Data Sheet - DOL			
		Project	Location		
Department/Author		Customer name	Customer ref.		Item name 1.0001
Our ref.		Rev/Changed by A	Date of issue 21/11/2017	Saving ident wimes stock.do2.xls	Pages 1(3)
No.	Definition	Data	Unit	Remarks	
1	Product	TEFC, 3-phase, squirrel cage induction motor			
2	Product code	3GBA 131 250-ADD		Calc. ref.	3GZF021013-274
3	Type/Frame	M2BAX 132SME 2			
4	Mounting	IM1001, B3(foot)			
5	Rated output P _N	7.5	kW		
6	Service factor	1			
7	Type of duty	S1(IEC) 100%			
8	Rated voltage U _N	400	VD	± 5 % (IEC 60034-1)	
9	Rated frequency f _N	50	Hz	± 2 % (IEC 60034-1)	
10	Rated speed n _N	2901	r/min		
11	Rated current I _N	13.1	A		
12	No-load current	3.2	A		
13	Starting current I _s /I _N	7.3		Fullfilled IEC 60034-12 design N,H	
14	Nominal torque T _N	24.7	Nm		
15	Locked rotor torque T _s /T _N	2.2			
16	Maximum torque T _{max} /T _N	3.7			
17	Minimum torque T _{min} /T _N	2.2			
18	Speed at minimum torque	0	r/min		
	Load characteristics (IEC 60034-2-1:2014)	Load %	Current A	Efficiency %	Power factor
19	PLL determined from residual loss	100	13.1	90.1 / IE3	0.91
20		75	10	91.1	0.89
21		50	7.1	91.2	0.84
22		Start	96		0.38
23	Maximum starting time from hot	15	s		
24	Maximum starting time from cold	27	s		
25	Insulation class / Temperature class	F / B			
26	Ambient temperature	40 °C			
27	Altitude	1000 m.a.s.l.			
28	Enclosure	IP55			
29	Cooling system	IC411 self ventilated			
30	Bearing DE/NDE	6208-2Z/C3 - 6208-2Z/C3			
31	Type of Grease				
32	Sound pressure level (LP dB(A) 1m)	71	dB(A)	at load	
33	Moment of inertia J = ¼ GD ²	0.02	kg-m ²		
34	Balancing				
35	Vibration class				
36	Position of terminal box	Top			
37	Terminal box entries; no, dimens.				
38	Number of power terminals				
39	Direction of rotation	CW or CCW			
40	Weight of rotor	15	kg		
41	Total weight of motor	83	kg		
42	Dimension drawing no.				
43					
44					
45					
Ex-motors					
46					
47					
48					
Option Variant Codes / Definition					
49					
50					
51					
52					
Remarks:					
Data based on situation 17/03/2016					
All data subject to tolerances in accordance with IEC					
Guaranteed values on request					


Project	Location
---------	----------

Department/Author	Customer name	Customer ref.	Item name 1.0001
-------------------	---------------	---------------	----------------------------

Our ref.	Rev/Changed by	Date of issue	Saving ident	Pages
	A	21/11/2017	wimes stock.do2.xls	2(3)

Product	TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 132SME 2	Calc. ref.	3GZF021013-274
Product code	3GBA 131 250-ADD		
Rated output P _N	7.5	kW	
Type of duty	S1(IEC) 100%		

Voltage (V)	400	Current I _N (A)	13.1	Power factor at P _N	0.91
Frequency (Hz)	50	Speed (r/min)	2901	Efficiency (%) at P _N	90.1

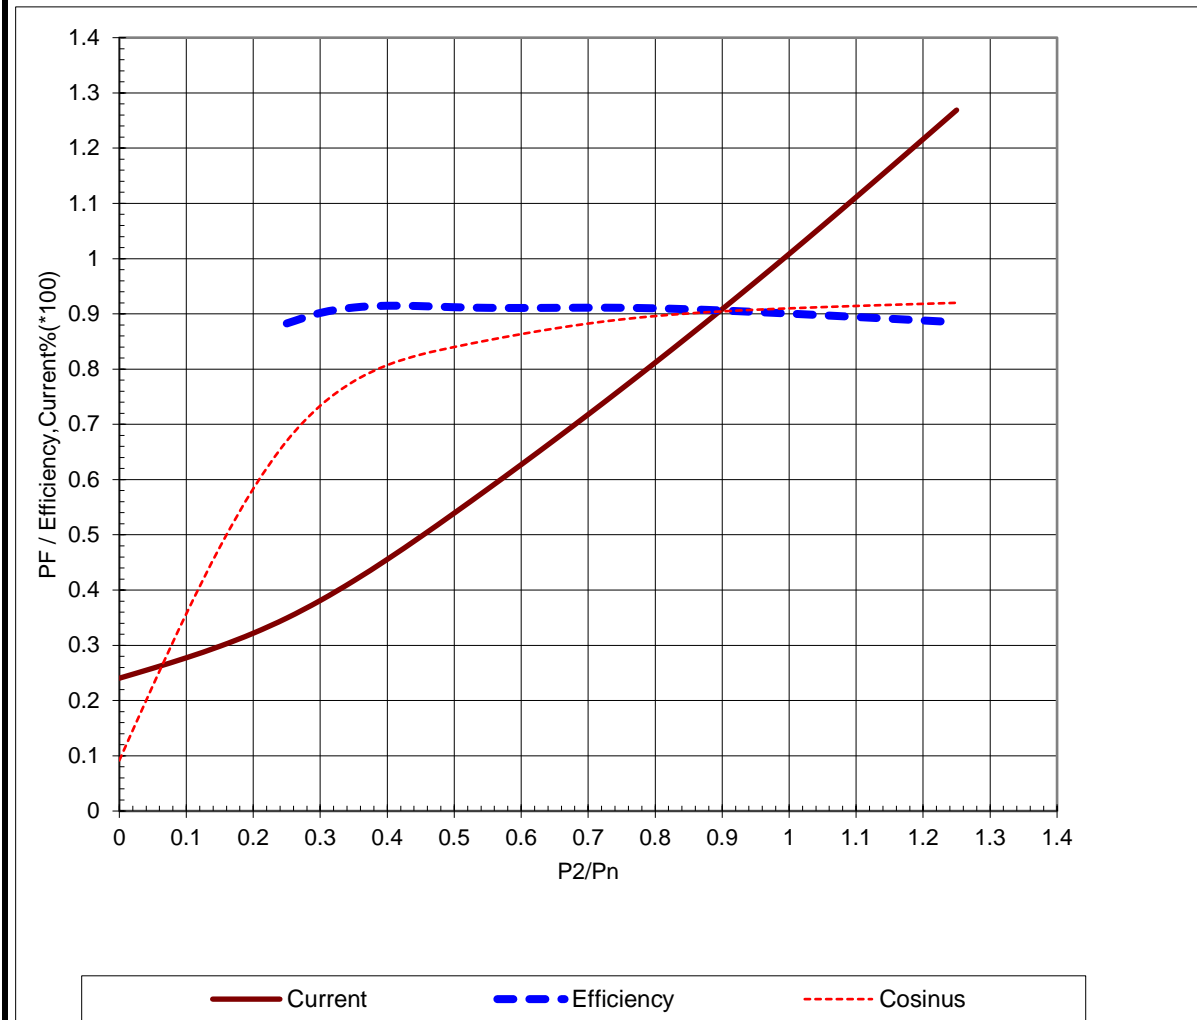

Load characteristics (IEC 60034-2-1:2014)
Data based on situation 17/03/2016


All data subject to tolerances in accordance with IEC



	Project	Location	
Department/Author	Customer name	Customer ref.	Item name 1.0001
Our ref.	Rev/Changed b Date of issue A 21/11/2017	Saving ident wimes stock.do2.xls	Pages 3(3)

Type of product	TEFC, 3-phase, squirrel cage induction motor		
Type/Frame	M2BAX 132SME 2	Calc. ref.	3GZF021013-274
Product code	3GBA 131 250-ADD	Frequency (Hz)	50
Rated output P _N	7.5 kW	Rated current I _N	13.1 A
Type of duty	S1(IEC) 100%		

J _{motor} (kgm ²)	0.02	Voltage (V) 100%	400	Voltage (V)	400V(100%)
J _{load} (kgm ²)		T _{start} /T _N	2.2	T _{start} /T _N	2.2
Speed (r/min)	2901	Starting time (s)		Starting time (s)	
T _N (Nm)	24.7	Speed (r/min)		Speed (r/min)	
T _{load} (Nm)		I _s /I _n	7.3	I _s /I _n	7.3
Nbr. of Consecutive Starts at UN		T _{max} /T _n	3.7	T _{max} /T _n	3.7

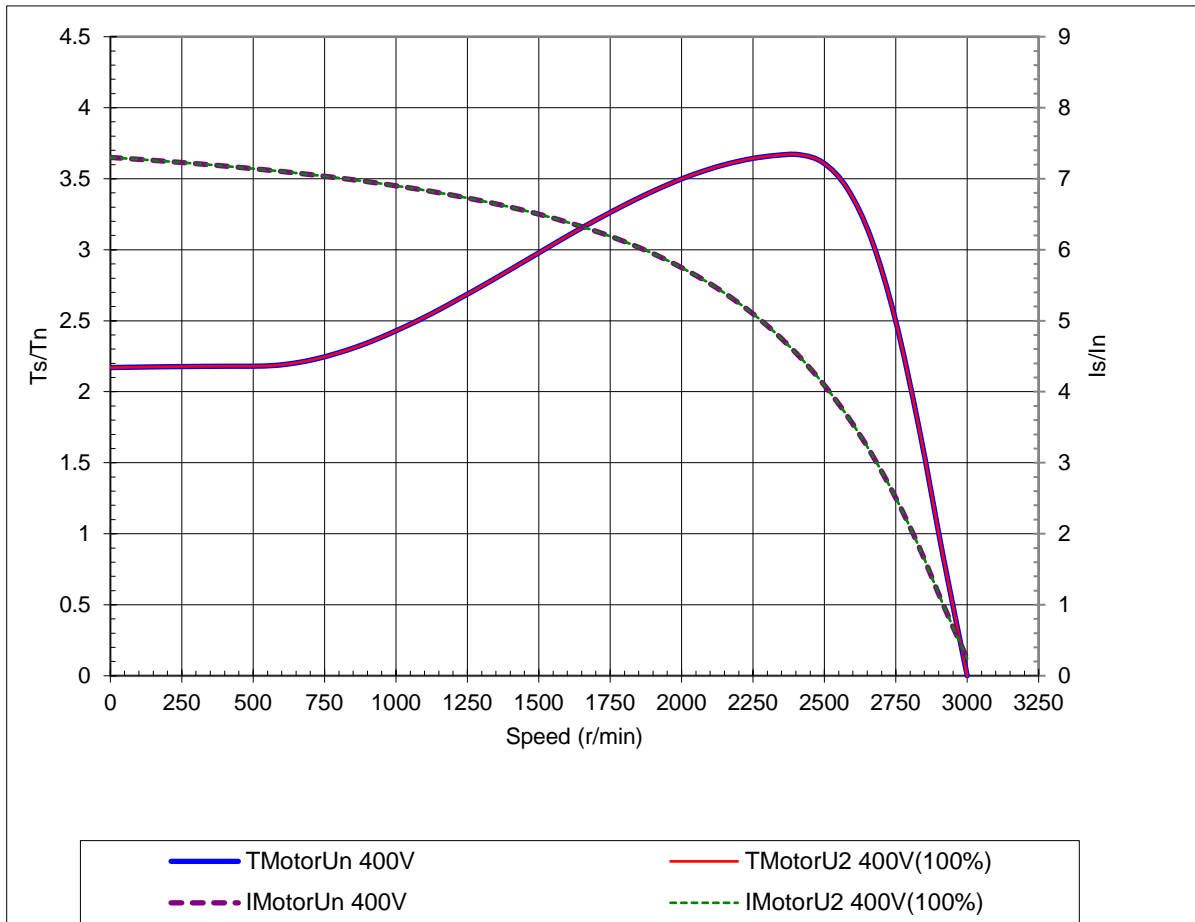

Load characteristics (IEC 60034-2-1:2014)
Data based on situation 17/03/2016

All data subject to tolerances in accordance with IEC